

ANNEXURE I
Copy of LoI



समाहरणालय, रोहतास, सासाराम।

(खनन शाखा)

पत्रांक:- 26 / खनन, सासाराम।

दिनांक:- 06/01/2024

ई-मेल :-miningrohtas@gmail.com

प्रेषित,

इनोसेन्ट ट्रेडर्स लि०

निदेशक-करण कुमार भुटोरियो

पिता-हनुमान मल भुटोरियो

पता-16 Strand Road, Diamond Heritage,

7th Floor Room No-701-D Kolkata-700001

ई-मेल innocenttradersltd@gmail.com

विषय :-

रोहतास जिलान्तर्गत सोन नदी के बालूघाट/ब्लॉक संख्या-11A की आगामी पाँच वर्षों के लिए बन्दोबस्ती हेतु दिनांक-27.12.2023 को सम्पन्न ई-नीलामी में उच्चतम डाकवक्ता घोषित होने के फलस्वरूप सैद्धांतिक स्वीकृत्यादेश के संबंध में।

उपर्युक्त विषयक रोहतास जिलान्तर्गत सोन नदी के बालूघाट/ब्लॉक संख्या-11A, रकबा-48 हेक्टेयर की आगामी पाँच वर्षों के लिए बन्दोबस्ती हेतु दिनांक-27.12.2023 को सम्पन्न ई-नीलामी में सुरक्षित जमा राशि मो०-12,96,00,000/-के विरुद्ध आपके द्वारा उच्चतम डाक की राशि मो०-15,55,20,000/- (पन्द्रह करोड़ पचपन लाख बीस हजार रू० मात्र) की बोली के फलस्वरूप आप उच्चतम डाकवक्ता घोषित हुए। निविदा दस्तावेज की कंडिका-20(i) के आलोक में आपके द्वारा नीलामी राशि की 25 प्रतिशत राशि (जमा अग्रधन राशि समायोजनोपरान्त) प्रतिभूति राशि मो०-64,80,000/-रू० (चौसठ लाख अस्सी हजार) रुपये के भुगतान का साक्ष्य दिनांक-01.01.2024 को कार्यालय में प्रस्तुत किया गया है।

निविदा दस्तावेज की कंडिका 20(i)(ii)(iii)(iv)(v) के आलोक में जिलान्तर्गत सोन नदी के बालूघाट/ब्लॉक संख्या-11A का सैद्धांतिक स्वीकृति के शर्त एवं बंधेज निम्नवत् हैं :-

1. बालूघाट/ब्लॉक संख्या-11A से संबंधित विवरणी निम्नवत् है :-

क्र०	नदी का नाम	बालूघाट/ब्लॉक संख्या	कुल रकबा (हे०)	Geo-co-ordinates	
				LATITUDE	LONGITUDE
1	SON	Block-11A	48	24°56'34.29"N	84°14'3.47"E
				24°56'18.52"N	84°14'23.88"E
				24°56'3.15"N	84°14'5.66"E
				24°56'22.78"N	84°13'47.52"E
2	वन क्षेत्र से दूरी-			13.47 किलो मीटर लगभग	
3	सुरक्षित क्षेत्र/वन अभ्यारण क्षेत्र/पक्षी अभ्यारण/वन्य जीव आश्रयण क्षेत्र से दूरी			लागू नहीं	
4	बालूघाट/बालूखण्ड से 500 मीटर के अन्दर खनन पट्टा क्षेत्र की स्थिति			हाँ, (कलस्टर रकबा 538.21 हे०)	
5	खनन योग्य मात्रा-			864000 घनमीटर	

2. भुगतान की शर्तें :-

- नीलामीत राशि केवल प्रथम वर्ष के लिए बंदोबस्ती की राशि मानी जाएगी। दूसरे वर्ष और उसके अनुक्रमी वर्षों में बंदोबस्ती की राशि गत वर्ष की बंदोबस्ती राशि के 120 प्रतिशत अथवा समय-समय पर सरकार द्वारा निर्धारित निदेशों के अनुरूप होगा।
- प्रतिभूति जमा के अतिरिक्त आपको निम्नलिखित समय सारणी/भुगतान अनुसूची के अनुसार बंदोबस्ती की राशि का भुगतान करना होगा :-

किस्त	भुगतान की नियत तारीख
प्रथम किस्त (50%)	(क) पट्टा संविदा निष्पादन से पहले (पहले वर्ष के लिए) (ख) प्रथम वर्ष में पट्टा संविदा निष्पादन की तिथि से एक वर्ष पूरा होने के 60 दिन पूर्व और अनुक्रमिक वर्षों में इसी प्रक्रिया का पालन करते हुए जमा किया जायेगा।
द्वितीय किस्त (25%)	पट्टा संविदा निष्पादन की तिथि से 03 महीना पूरा होने से पहले।
तृतीय किस्त (25%)	पट्टा संविदा निष्पादन की तिथि से 06 महीना पूरा होने से पहले।

3. **GST का भुगतान :-** जी0एस0टी0 के रूप में प्रचलित दर के अनुसार राशि वाणिज्य कर विभाग को भुगतान करना होगा। जिला खनन कार्यालय, रोहतास, सासाराम में जी0एस0टी0 भुगतान का प्रमाण प्रत्येक किस्त के साथ देना होगा।

4. **आयकर/अन्य करों का भुगतान :-** आयकर अधिनियम के तहत आयकर एवं उस पर नियमानुसार देय अधिभार का भुगतान आयकर विभाग के प्रचलित दर के अनुसार एक मुश्त करना होगा। यह राशि बंदोबस्ती राशि के प्रत्येक किस्त के साथ देय होगी। जिला खनन कार्यालय, रोहतास, सासाराम द्वारा यह राशि आयकर मद में जमा करा दी जायेगी।

5. **जिला खनिज फाउण्डेशन :-** Bihar Mineral District Foundation Rules, 2018 के अनुसार बंदोबस्ती राशि की दो (2) प्रतिशत राशि जिला खनिज फाउण्डेशन, रोहतास, सासाराम के नाम भुगतान बैंक ड्राफ्ट के माध्यम से करना होगा।

6. **वैधानिक अनापत्ति :-** बालूघाट संचालन हेतु आवश्यक समस्त वैधानिक अनापत्ति/अनुमति यथा:- खनन योजना, पर्यावरणीय स्वीकृति, जल एवं वायु सहमति आदि आपके द्वारा सैद्धांतिक स्वीकृति (LOI) निर्गत तिथि से तीन माह की अवधि के अन्दर प्राप्त करना सुनिश्चित करेंगे। वैधानिक अनापत्ति/अनुमति प्राप्त करने के पश्चात् ही बालू खनन प्रारंभ किये जाने हेतु कार्यदेश निर्गत किया जा सकेगा। वैधानिक अनापत्ति/अनुमति निम्नानुसार है:-

- खनन योजना:-** खनन योजना प्रभावी नियमों में उल्लिखित प्रावधानों के अनुसार सफल डाकवक्ता/बंदोबस्तधारी द्वारा QCI/NABET से मान्यता प्राप्त Professional RQP से तैयार कर निदेशक, खान या विभाग द्वारा प्राधिकृत पदाधिकारी के समक्ष लेटर ऑफ इंटेन्ट निर्गत होने से 30 दिनों के अन्दर अनुमोदन के लिए प्रस्तुत करेगा। खनन योजना बनाने पर होने वाले व्यय का वहन संबंधित खनिज डाकवक्ता/बंदोबस्तधारी द्वारा किया जायेगा। साथ ही खनन योजना की जाँच हेतु समाहर्ता/विभाग अन्य ऐजेंसी चयनित कर सकेगा, जिसका निर्धारित फीस/खर्च भी बंदोबस्तधारी को ही वहन करना होगा। सफल डाकवक्ता/बंदोबस्तधारी खनन योजना के अनुसार खनन करना सुनिश्चित करेंगे।
- पर्यावरणीय स्वीकृति:-** सफल डाकवक्ता/बंदोबस्तधारी खनन योजना अनुमोदन के 15 दिनों के अन्दर पर्यावरण, वन एवं जलवायु परिवर्तन मंत्रालय, भारत सरकार के सक्षम प्राधिकार के समक्ष पर्यावरणीय स्वीकृति (EC) के लिए प्रस्ताव समर्पित करेगा। समयबद्ध रीति से पर्यावरणीय एवं अन्य वैधानिक स्वीकृति प्राप्त करना सफल डाकवक्ता की जिम्मेवारी होगी। अपेक्षित पर्यावरणीय स्वीकृति एवं अन्य आवश्यक स्वीकृति प्राप्त करने में किसी भी प्रकार की देरी के लिए सफल डाकवक्ता स्वयं जिम्मेवार होंगे एवं इस संबंध में किसी भी प्रकार की क्षतिपूर्ति के लिए कोई भी दावा मान्य नहीं होगा।
- जल एवं वायु सहमति:-** पर्यावरणीय स्वीकृति प्राप्त करने के पश्चात् सफल डाकवक्ता अधिकतम 07 (सात) दिवस के अंदर जल (प्रदूषण निवारण एवं नियंत्रण) अधिनियम, 1974 तथा वायु (प्रदूषण

निवारण एवं नियंत्रण) अधिनियम, 1981 के अधीन सक्षम पदाधिकारी के समक्ष सहमति/Consent to Establish/ Consent to Operate प्राप्त करने हेतु आवेदन प्रस्तुत करेगा।

- iv. खनन के लिए अनुमत मात्रा:- खनन योजना, पर्यावरणीय स्वीकृति तथा जल (प्रदूषण निवारण एवं नियंत्रण) अधिनियम, 1974 तथा वायु (प्रदूषण निवारण एवं नियंत्रण) अधिनियम, 1981 के तहत प्राप्त सहमति में वर्णित बालू की मात्रा (इनमें से जो भी कम हो) तक ही खनन अनुमान्य होगा। यदि अनुमोदित खनन योजना, पर्यावरणीय स्वीकृति तथा जल एवं वायु सहमति में खनन योग्य मात्रा कम किये जाने पर भी वार्षिक देय बंदोबस्ती राशि किसी स्थिति में कम नहीं की जाएगी।
- v. बिना किसी वैध कारण के पर्यावरणीय स्वीकृति, Consent to Establish/ Consent to Operate /जल एवं वायु सहमति प्राप्त नहीं कर पाते हैं या प्राप्त करने में रुचि नहीं लेते हैं तो, समाहर्ता द्वारा अग्रधन राशि जप्त कर पुनः नीलामी की कार्यवाई की जायगी।

7. बंदोबस्ती विलेख/पट्टा संविदा (डीड) निष्पादन करना :-

- i. सफल डाकवक्ता द्वारा सभी वैधानिक अनापत्ति प्राप्त करने के उपरान्त 5 वर्षों की अवधि के लिए बालू खनन करने हेतु समानुदान/बंदोबस्ती स्वीकृत किया जाएगा। सफल डाकवक्ता विहित प्रपत्र में संबंधित नियमानुसार बंदोबस्ती विलेख अथवा उसके समरूप एक प्रपत्र, कार्य आरंभ करने के पहले, निष्पादित करेगा तथा विहित अपेक्षित राशि संबंधित विभाग में जमा देगा। बंदोबस्तधारी के पट्टे की अवधि विलेख/संविदा निष्पादन की तिथि से पाँच वर्षों के लिए विधिमान्य होगा।
- ii. बंदोबस्तधारी को निष्पादित संविदा का निबंधन संबंधित विभाग के प्रचलित नियमों के अधीन 01 माह के अन्दर कराना अनिवार्य होगा।
8. सफल डाकवक्ता/बंदोबस्तधारी द्वारा बंदोबस्ती प्रत्यार्पण/कारोबार छोड़ने का विकल्प बिहार खनिज (समानुदान, अवैध खनन, परिवहन एवं भण्डारण निवारण) नियमावली, 2019 के नियम-50 के अनुरूप किया जा सकेगा।

9. सामान्य शर्तें :-

- (i) बंदोबस्तधारी नदी तट से बालू प्रेषण के बिन्दु पर एक साईनबोर्ड एवं सीमा स्तंभ का अधिष्ठापन करायेगा जिसपर बंदोबस्तधारी का नाम एवं पता, बंदोबस्ती की अवधि, स्थानीय मैनेजर का नाम एवं पता तथा बालू का विक्रय मूल्य प्रदर्शित किया जाएगा। यदि साईन बोर्ड निरीक्षण में नहीं पाया गया तो शास्ति अधिरोपित की जाएगी।
- (ii) बंदोबस्तधारी श्रम विधियों के प्रावधानों के अनुसार आश्रय गृह, पीने का पानी, शिशु गृह (क्रेचेज) तथा फर्स्ट एड किट की व्यवस्था संबंधित बालूघाटों में लगे श्रमिकों के लिए करेगा।
- (iii) बंदोबस्तधारी संबंधित क्षेत्रों का निरीक्षण करेगा तथा स्वयं/अथवा अपने द्वारा अधिकृत प्रतिनिधियों के माध्यम से बालूघाटों का प्रचालन करेगा। किसी रूप में किये गये उपपट्टा (सबलेटिंग) के लिए बंदोबस्ती रद्द कर दी जाएगी। बालूघाटों/नदी तल तक बालू के परिवहन के प्रयोजनार्थ पहुँच-पथ (अप्रोच रोड) का निर्माण सफल डाकवक्ता/बंदोबस्तधारी द्वारा स्वयं अपने खर्च से किया जाएगा।
- (iv) बालूघाट की सुरक्षा की जिम्मेदारी सफल डाकवक्ता/बंदोबस्तधारी की होगी।
- (v) सफल डाकवक्ता/बंदोबस्तधारी बंदोबस्त क्षेत्र के भीतर किसी अवैध खनन के लिए जिम्मेवार होंगे और पाई गई किसी शिकायत पर गंभीरता से विचार किया जाएगा तथा सफल डाकवक्ता/बंदोबस्तधारी के विरुद्ध नियमानुसार कार्यवाई की जायगी।
- (vi) सफल डाकवक्ता/बंदोबस्तधारी समाहर्ता द्वारा बालूघाटों के संचालन के संबंध में लोकहित में जारी निर्बंधनों और शर्तों तथा निदेशों का पालन करेगा।
- (vii) यथोक्त शर्तों, बंधेजों एवं निर्बंधनों का पालन नहीं करने पर कारण पृच्छा निर्गत कर बंदोबस्ती रद्द करने की कार्यवाई की जा सकेगी।
- (viii) सफल डाकवक्ता/बंदोबस्तधारी को खनन राजस्व/जी0एस0टी0/आयकर/स्टाम्प शुल्क/रजिस्ट्रेशन फीस का भुगतान नहीं करने की दशा में 30 दिनों के अंदर कारण स्पष्ट करने हेतु नोटिस दी जायेगी। निर्धारित अवधि के अंदर सफल डाकवक्ता/बंदोबस्तधारी द्वारा बकाया का भुगतान करने में असफल रहने की दशा में राशि वसूली की कार्यवाई के साथ-साथ बंदोबस्ती रद्द करने की भी कार्यवाई की जाएगी।

- (ix) नीलामी हेतु प्रस्तावित बालूघाटों से संबंधित तकनीकी तथा अन्य बिन्दुओं यथा भूमि के अंचल, थाना, मौजा, खाता, खेसरा, रकबा तथा GPS Co-ordinate के संबंध में विवाद/त्रुटि पाए जाने पर संशोधन का अधिकार समाहर्ता, रोहतास, सासाराम/जिला खनन कार्यालय, रोहतास, सासाराम का होगा। बालूघाटों का सीमांकन एवं नियमानुसार निर्धारित आयाम/विशिष्टियों का सीमा स्तंभ का अधिष्ठापन GPS Co-ordinate के अनुसार बालू बंदोबस्तधारी को कराना होगा तथा खनन के क्रम में संधारित कराना सफल डाकवक्ता/बंदोबस्तधारी की जवाबदेही होगी, जिसे RQP/ अंचलाधिकारी की उपस्थिति में प्रमाणित कर बालूघाटों के निर्धारित क्षेत्र का Reduced Level (RL)/Pre-Level (PL) एवं Satellite images खनन कार्य प्रारंभ करने के पहले जिला खनन कार्यालय, रोहतास, सासाराम में समर्पित करना होगा।
- (x) बालूघाट से लिफ्ट रोड और बालूघाट के बीच कोई प्राकृतिक जल मार्ग सिंचाई नहर पड़ती हो सफल डाकवक्ता/बंदोबस्तधारी जल संसाधन विभाग की पूर्व अनुमति से अस्थायी संरचनाएँ खड़ा कर सकेगा। पूर्व अनुमति के लिए ऐसे आवेदन जल संसाधन विभाग के संबंधित मुख्य अभियंता के समक्ष दिए जाएंगे।
- (xi) बालूघाट में रैयती/बंदोबस्त जमीन होने पर संबंधित रैयत से सहमति प्राप्त कर बालू का खनन करना होगा। यह जिम्मेदारी पूर्णतः बंदोबस्तधारी की होगी एवं विभाग से कोई क्षतिपूर्ति का दावा मान्य नहीं होगा।
- (xii) बंदोबस्तधारी द्वारा बंदोबस्ती अवधि के दौरान किसी भी कारण से खनन कार्य नहीं करने की स्थिति में किसी भी प्रकार का मुआवजा/नुकसान एवं क्षतिपूर्ति का दावा मान्य नहीं होगा।
- (xiii) ई-नीलामी एवं बालूघाट की बंदोबस्ती अवधि के दौरान उत्पन्न किसी भी प्रकार का विवाद बिहार खनिज (समानुदान, अवैध खनन, परिवहन एवं भंडारण निवारण) नियमावली 2019, (यथा संशोधित) के अधीन होगा।
- (xiv) सफल डाकवक्ता/बंदोबस्तधारी को इलेक्ट्रॉनिक माध्यम से भेजी गयी कोई भी सूचना/निर्देश/आदेश इत्यादि IT-Act के तहत स्वीकार्य साक्ष्य के रूप में माना जायेगा।


समाहर्ता,
रोहतास, सासाराम।

ANNEXURE II
Mine Plan Approval Letter

बिहार सरकार
खान एवं भूतत्व विभाग

पत्रांक- 664 / एम0, पटना,
प्रेषक,

दिनांक- 23/02/2024

सेवा में,

Email

इनोसेन्ट ट्रेडर्स लि0

निदेशक-करण कुमार भुटोरियो

पिता-हनुमान मल भुटोरियो

पता-16 Strand Road, Diamond Heritage,

7th Floor Room No-701-D Kolkata-700001

ई-मेल innocenttradersltd@gmail.com

विषय:-

रोहतास जिला के सोन नदी बालूघाट/ब्लॉक- 11A के खनन योजना के अनुमोदन के संबंध में।

महाशय,


उपर्युक्त विषय के संबंध में कहना है कि बिहार बालू खनन नीति-2019 यथा संशोधित एवं बिहार खनिज (समानुदान अवैध खनन, परिवहन एवं भंडारण निवारण) नियमावली, 2019 (यथा संशोधित 2021) के नियम-17 में वर्णित प्रावधानों के तहत रोहतास जिला के सोन नदी/ब्लॉक- 11A से संबंधित समर्पित खनन योजना के अनुमोदन पर प्राधिकृत समिति द्वारा समीक्षा की गई। समीक्षोपरांत निम्न शर्तों एवं बंधेजों के तहत खनन योजना अनुमोदित की गई है :-

1. उक्त खनन योजना केन्द्र सरकार/राज्य सरकार द्वारा विनियमित अन्य सभी अधिनियम/नियमावली में वर्णित प्रावधानों को तथा किसी न्यायालय/अन्य न्यायिक संस्था द्वारा पारित किये गये न्यायादेशों को बिना प्रभावित किये अनुमोदित किया जा सकता है।
2. उक्त खनन योजना का अनुमोदन खान एवं खनिज (विकास एवं विनियमन) अधिनियम, 1957 (यथा संशोधित), बिहार खनिज (समानुदान अवैध खनन, परिवहन एवं भंडारण निवारण) नियमावली, 2019 के नियम-17, वन संरक्षण अधिनियम, 1980, पर्यावरण सुरक्षा अधिनियम, 1986, श्रम संबंधी नियम, EMGSM 2020 तथा अन्य सभी सुसंगत अधिनियम/नियमावली तथा उनमें वर्णित प्रावधानों के प्रतिकूल नहीं होगा। लीज के रकवा के अनुसार प्रति हेक्टेयर कम से कम 10 पौधा लगाना होगा तथा 50 प्रतिशत Survival सुनिश्चित करना होगा।
3. खनन योजना में निहित शर्तों का पालन करते हुए ही बालू खनिज का खनन तथा प्रेषण किया जायेगा।
4. संबंधित सक्षम प्राधिकार से यथा वांछित प्रमाण-पत्र प्राप्त कर विभाग को अवगत कराना अनिवार्य होगा।
5. यदि किसी भी समय खनन योजना में वर्णित शर्तों के अनुपालन में अनियमितता पायी जाती है, तो खनन पदाधिकारी को नियमानुसार आवश्यक कार्रवाई करने का अधिकार होगा।
6. संबंधित बालूघाट में खनिज की उपलब्धता, पहुँच पथ का निर्माण तथा अन्य खनन कार्यों से संबंधित सम्पूर्ण जबाबदेही बालूघाट संचालनकर्ता की होगी तथा इसमें किसी भी तरह का कोई दावा अथवा क्षतिपूर्ति मान्य नहीं होगा।
7. खनन योजना में वर्णित सभी तकनीकी तथा अन्य बिन्दुओं से संबंधित ऑकड़ों की सत्यता / वैधता की जिम्मेवारी RQP/बंदोबस्तधारी की होगी तथा भविष्य में उपर्युक्त के संबंध में किसी प्रकार की भिन्नता/अनियमितता की पूरी जबाबदेही RQP/बंदोबस्तधारी की होगी।

8. खनन् कार्य के दौरान घाट संचालनकर्ता द्वारा पर्यावरण संबंधी मानकों का नियमित रूप से अनुश्रवण करने की व्यवस्था करनी होगी। खनन् कार्य के दौरान नदियों के प्राकृतिक बहाव आदि में किसी भी तरह का व्यवधान/रूकावट/बदलाव करना पूर्ण रूप से प्रतिबंधित होगा।
9. बालूघाट में Secondary Loading की व्यवस्था इस प्रकार सुनिश्चित की जाएगी ताकि गीला बालू का परिवहन नहीं हों।
10. यद्यपि खनन योजना में Semi-mechanised mining को प्राथमिकता दी गयी है तथापि Manual Mining पर कोई प्रतिबंध नहीं रखा जाएगा एवं स्थानीय व्यक्तियों को नियोजन देने के दृष्टिकोण से Manual Mining को उचित अवसर प्रदान करना होगा।
11. सफल डाकवक्ता/बंदोबस्तधारी द्वारा खान एवं खनिज (विकास एवं विनियमन) अधिनियम, 1957, बिहार खनिज (समानुदान अवैध खनन, परिवहन एवं भंडारण निवारण) नियमावली, 2019 (यथा संशोधित 2021) तथा बिहार बालू खनन नीति, 2019 के प्रावधानों का अनिवार्य रूप से पालन किया जायेगा।
12. सफल डाकवक्ता/बंदोबस्तधारी को पर्यावरण सुरक्षा हेतु सभी उपाय करने होंगे तथा नियमित रूप से जल/वायु की गुणवत्ता की जाँच/अनुश्रवण की व्यवस्था सुनिश्चित करनी होगी।
13. सफल डाकवक्ता/बंदोबस्तधारी को उत्पादन/प्रेषण का आँकड़ा एवं पंजी संधारित करना अनिवार्य होगा जिसे नियमित रूप से अद्यतन किया जाएगा।
14. संचालन करने वाले घाटों की सीमांकन कराना, RI/PL प्राप्त करना एवं उसे खनन के क्रम में संधारित कराना सफल डाकवक्ता/बंदोबस्तधारी की जवाबदेही होगी, जिसे RQP/अंचलाधिकारी की उपस्थिति में प्रमाणित करवाकर खनन कार्य करना होगा।
15. बिहार खनिज (समानुदान अवैध खनन, परिवहन एवं भंडारण निवारण) नियमावली, 2019 (यथा संशोधित 2021) में वर्णित प्रतिबंधित क्षेत्रों में किसी प्रकार का खनन् कार्य वर्जित होगा।
16. बालूघाटों से बालू का निष्कासन एवं प्रेषण आबादी से सटे ग्रामीण सड़क को छोड़कर अलग मार्ग से करना होगा।
17. खनन योजना की एक-एक प्रति, जो संबंधित RQP द्वारा प्रत्येक पृष्ठ पर हस्ताक्षरित होगी, निदेशक, खान एवं भूतत्व विभाग के कार्यालय के अतिरिक्त समाहर्ता, रोहतास के गोपनीय कोषांग, उपनिदेशक, पटना अंचल, पटना के कार्यालय में उपलब्ध कराना सुनिश्चित किया जायेगा, ताकि किसी भी समय इसकी जाँच की जा सके।

प्राधिकृत समिति की अनुशंसा के आलोक में उपरोक्त शर्तों के साथ रोहतास सोन नदी बालूघाट/ब्लॉक- 11A से संबंधित समर्पित खनन योजना के अन्तर्गत ही बालू उत्खनन् कार्य सुनिश्चित कराया जायेगा।

विश्वासभाजन



(सुरेश प्रसाद)

विशेष कार्य पदाधिकारी



Annexure –III
(Public Hearing Proceedings)



बिहार राज्य प्रदूषण नियंत्रण पर्षद

परिवेश भवन, एन.एस-बी/2, पाटलीपुत्र, औद्योगिक क्षेत्र,

पो-सदाकत आश्रम, पटना-800010

E-mail: msbspcb-bih@gov.in, वेबसाइट - http://bspcb.bih.nic.in.

पत्रांक:

पटना, दिनांक:

प्रेषक,

एस0 चन्द्रशेखर, भा0व0से0

सदस्य-सचिव

सेवा में,

सदस्य सचिव,

राज्य पर्यावरण समाघात निर्धारण प्राधिकरण,

बैल्ट्रोन भवन, शास्त्री नगर,

पटना-800023.

विषय: मेसर्स इनोसेंट ट्रेडर्स लिमिटेड, निदेशक-श्री करण कुमार भुटोरिया, पिता- श्री हनुमानमल भुटोरिया, 16 स्ट्रैंड रोड, डायमंड हेरिटेज, 7वीं मंजिल कमरा नंबर-701-डी, कोलकाता द्वारा रोहतास सोन -11A बालू घाट, मौजा-बेरकप, ब्लॉक-डेहरी, जिला-रोहतास में स्थित बालू घाट से बालू उत्खनन कार्य हेतु सम्पन्न लोक सुनवाई के संबंध में।

महाशय,

उपरोक्त विषयक के प्रसंग में सूचित करना है कि पर्यावरण, वन एवं जलवायु परिवर्तन मंत्रालय, भारत सरकार के अधिसूचना सं0-S.O.1533, दिनांक 14 सितम्बर, 2006 के आलोक में मेसर्स इनोसेंट ट्रेडर्स लिमिटेड, निदेशक-श्री करण कुमार भुटोरिया, पिता- श्री हनुमानमल भुटोरिया, 16 स्ट्रैंड रोड, डायमंड हेरिटेज, 7वीं मंजिल कमरा नंबर-701-डी, कोलकाता द्वारा रोहतास सोन -11A बालू घाट, मौजा-बेरकप, ब्लॉक-डेहरी, जिला-रोहतास से बालू खनन हेतु प्राप्त आवेदन के आलोक में दिनांक 18.06.2024, अपराह्न 01:30 बजे सम्पन्न लोक सुनवाई का वृत्त, उपस्थिति पंजी एवं संबंधित सी0 डी0 की प्रति संलग्न कर अग्रेतर कारवाई हेतु भेजी जा रही है।

अनुलग्नक: यथोपरि।

विश्वासभाजन

ह0/-

(एस0 चन्द्रशेखर)

सदस्य-सचिव

ज्ञापांक :-

पटना, दिनांक :-

प्रतिलिपि:-जिला पदाधिकारी, रोहतास को सूचनार्थ एवं आवश्यक कारवाई हेतु प्रेषित।

अनुलग्नक: यथोपरि।

ह0/-

(एस0 चन्द्रशेखर)

सदस्य-सचिव



ज्ञापांक :-

पटना, दिनांक :-

प्रतिलिपि:- मेसर्स इनोसेंट ट्रेडर्स लिमिटेड, निदेशक-श्री करण कुमार भुटोरिया, पिता- श्री हनुमानमल भुटोरिया, 16 स्ट्रैंड रोड, डायमंड हेरिटेज, 7वीं मंजिल कमरा नंबर-701-डी, कोलकाता को सूचनार्थ प्रेषित।

अनुलग्नक: यथोपरि।

ह0/-

(एस0 चन्द्रशेखर)


सदस्य-सचिव

ज्ञापांक :- 1588

पटना, दिनांक :- 02-7-24

प्रतिलिपि:-श्री नीरज कुमार, सहायक प्रोग्रामर, बि. रा. प्र. नि. पर्षद, पटना को निदेश है कि दिनांक 18.06.2024 को की गई लोक सुनवाई का वृत्त, उपस्थिति पंजी एवं संबंधित सी0 डी0 की प्रति पर्षद के वेबसाइट पर डिसप्ले कराया जाय।

अनुलग्नक: यथोपरि।

 02/7/24
(एस0 चन्द्रशेखर)
सदस्य-सचिव

लोक सुनवाई का वृत्त।

मेसर्स इनोसेंट ट्रेडर्स लिमिटेड, निदेशक-श्री करण कुमार भुटोरिया, पिता- श्री हनुमानमल भुटोरिया, 16 स्ट्रैंड रोड, डायमंड हेरिटेज, 7वीं मंजिल कमरा नंबर-701-डी, कोलकाता द्वारा रोहतास सोन -11A बालू घाट, मौजा-बेरकप, ब्लॉक-डेहरी, जिला-रोहतास के अन्तर्गत परियोजना से संबंधित पर्यावरणीय स्वीकृति के वास्ते पर्यावरण, वन एवं जलवायु परिवर्तन मंत्रालय, भारत सरकार के अधिसूचना सं०-एस.ओ.1533, दिनांक 14 सितम्बर, 2006 के तहत दिनांक 18.06.2024 को अपराह्न 01:30 बजे रोहतास जिला के अंचल कार्यालय, डेहरी, जिला-रोहतास में लोक सुनवाई की गयी।

पर्यावरण, वन एवं जलवायु परिवर्तन मंत्रालय, भारत सरकार अधिसूचना सं०-एस.ओ. 1533, दिनांक 14 सितम्बर 2006 एवं यथा संशोधित के तहत राज्य स्तरीय पर्यावरणीय समाघात निर्धारण प्राधिकरण, बिहार के द्वारा निर्गत TOR File.No.SIA/1(a)/2510/2024, dated 06.03.2024 के आलोक में श्री सूर्य प्रताप सिंह, भा०प्र०से०, अनुमण्डल पदाधिकारी, डेहरी, रोहतास (जिला पदाधिकारी, रोहतास के प्रतिनिधि) की अध्यक्षता में बिहार राज्य प्रदूषण नियंत्रण पर्वद, द्वारा दिनांक 18.06.2024 को अपराह्न 01:30 बजे अंचल कार्यालय, डेहरी, जिला-रोहतास में लोक-सुनवाई आयोजित की गयी। उपस्थिति पंजी संलग्न (अनुलग्नक-1)

इस लोक-सुनवाई की सूचना बिहार राज्य प्रदूषण नियंत्रण पर्वद द्वारा दैनिक समाचार पत्रों यथा दैनिक जागरण एवं दैनिक भास्कर के माध्यम से दिनांक 14.05.2024 को प्रकाशित की गयी थी (प्रतिलिपि संलग्न)। लोक-सुनवाई के दौरान श्री आशीष कुमार गुप्ता, क्षेत्रीय पदाधिकारी, बिहार राज्य प्रदूषण नियंत्रण पर्वद, पटना द्वारा लोक-सुनवाई में उपस्थित जन-समुदाय एवं सभी संबंधित पदाधिकारियों का स्वागत करते हुए पर्यावरण, वन एवं जलवायु परिवर्तन मंत्रालय, भारत सरकार द्वारा अधिसूचित पर्यावरण प्रभाव मूल्यांकन अधिसूचना सं०-एस.ओ.1533, दिनांक 14 सितम्बर 2006 एवं यथा संशोधित के तहत इकाई के पर्यावरणीय स्वीकृति हेतु लोक-सुनवाई की पृष्ठ-भूमि पर प्रकाश डाला गया। लोक हित में कार्य योजना से संबंधित सुनवाई के उद्देश्य से उपस्थित लोगों को अवगत कराया गया। साथ ही स्थानीय लोगों से पर्यावरण संरक्षण एवं लोक हित के संबंध में सुझाव/विचार/मंतव्य माँगा गया।

लोक सुनवाई कार्यक्रम के अध्यक्ष के अनुमति से परियोजना के पर्यावरणीय सलाहकार मो० अमीर अख्तर ने इकाई की खनन कार्य परियोजना, प्रदूषण नियंत्रण व्यवस्था एवं कॉरपोरेट पर्यावरण जिम्मेदारी (Corporate Environmental Responsibility) आदि के संबंध में आमजनों को विस्तृत रूप से अवगत कराया। इनके द्वारा सूचित किया गया कि खनन कार्य के उपरान्त परिवहन के दौरान उत्सर्जित होने वाले धूल-कण की रोक-थाम हेतु सड़को पर नियमति रूप से जल छिड़काव किया जायेगा। वाहनों पर ओवरलोडिंग नहीं की जायेगी। वाहनों को तिरपाल से ढक कर ले जाया जायेगा। खनन कार्य सतह से 3 मीटर की गहराई तक या भू-जल स्तर से ऊपर तक किया जायेगा। ध्वनि प्रदूषण को नियंत्रित करने हेतु ध्वनि यंत्र (हार्न) का न्यूनतम उपयोग किया जायेगा।

L

11

पुराने एवं खराब वाहनों का इस्तेमाल नहीं किया जायेगा। सड़क के किनारे एवं खनन पट्टा क्षेत्र में वृक्षारोपण (480 नं०) का कार्य किया जायेगा। बालू खनन के दौरान पर्यावरण, वन एवं जलवायु परिवर्तन मंत्रालय, भारत सरकार के Sustainable Sand Mining Management Guidelines 2016 (SSMG-2016) एवं Enforcement & Monitoring Guidelines for Sand Mining-2020 (EMGSM-2020) के प्रावधानों का अनुपालन किया जायेगा।

परियोजना प्रस्तुतिकरण के पश्चात् उपस्थित महानुभावों द्वारा दिए गए सुझाव/मंतव्य निम्नवत है:-

क्रमांक	नाम एवं पता	प्रतिक्रिया/सुझाव
1.	श्री राकेश कुमार अम्बेदकर, ग्राम-बेरकप, जिला-रोहतास।	इनके द्वारा बताया गया कि हमारी हजारों एकड़ जमीन सोन नदी में चली गयी है। इनके द्वारा बताया गया कि बालू से लदा ट्रक तिरपाल से ढक्कर ले जाया जाता है, फिर भी बालू गीरता है। बालू रोड पर जमा हो जाता है, इसलिए सड़क पर से बालू का सफाई कराया जाय एवं नियमित रूप से पानी का छिड़काव किया जाय। पट्टा धारक द्वारा बताया गया कि इन सभी बातों का हम अनुपालन सुनिश्चित करेंगे।

अध्यक्ष द्वारा बताया गया कि बालू का उपयोग निर्माण कार्य में किया जाता है एवं राज्य का विकास होता है। विकास के साथ पर्यावरण पर भी ध्यान देना आवश्यक है।

उनके द्वारा बताया गया कि वृक्षारोपण लगे हुए नहीं दिखते हैं। पेड़ लगाने के बाद उसका संरक्षण नहीं किया जाता है। रख-रखाव के बाद भी 70% पेड़ का ही Survival हो पाता है। अध्यक्ष महोदय द्वारा निदेश दिया गया कि प्रति हेक्टेयर कम-से-कम 20 वृक्ष लगाया जाय। वृक्ष लगाने के बाद संरक्षण कम-से-कम छः महीने तक किया जाय। पट्टाधारक गाँव एवं शहर के लोग से मिलकर वृक्षारोपण सुनिश्चित करें।

बालू के परिवहन के दौरान ट्रक सड़क के किनारे मनमाने ढंग से खड़ा करते हैं। ट्रैफिक की समस्या बन जाती है। पट्टाधारक ट्रैफिक के नियमों का अनुपालन सुनिश्चित करेंगे।

बालू के परिवहन के दौरान पट्टाधारक ट्रक को तिरपाल से ढकना सुनिश्चित करेंगे।

पट्टाधारक कॉर्पोरेट पर्यावरण जिम्मेदारी (CER) के तहत क्षेत्र का विकास के लिए योगदान देंगे।






उन्होंने उम्मीद जताया कि इकाई प्रबंधन द्वारा इन उपरोक्त बिन्दुओं पर गम्भीरता से ध्यान रखा जायेगा। साथ ही वैज्ञानिक तरीके से बालू खनन का कार्य एवं विभागीय निर्देश का अनुपालन किया जायेगा।

अध्यक्ष महोदय द्वारा आम जनता से भी पर्यावरण संरक्षण हेतु सहभागिता की अपील की गयी। पट्टाधारक द्वारा नियमों का अनुपालन सुनिश्चित नहीं होने पर शिकायत मिले तो कारवाई निश्चित तौर पर की जायेगी।

जन-सुनवाई के अंत में उपस्थित जनता के सुझाव को संग्रहित करते हुए सक्षम प्राधिकार को अग्रसारित करने का निर्णय लिया गया। तत्पश्चात् लोक सुनवाई सधन्यवाद समाप्त करने की घोषणा की गयी।















क्षेत्रीय पदाधिकारी
बि.रा.प्र.नि.पर्षद, पटना


अनुमण्डल पदाधिकारी,
डेहरी, रोहतास

उपस्थिति सूची

मेसर्स इनोसेंट ट्रेडर्स लिमिटेड, निदेशक-श्री करण कुमार भुटोरिया द्वारा रोहतास सोन -11A बालू घाट, मौजा-बेरकप, ब्लॉक-डेहरी, जिला-रोहतास से संबंधित पर्यावरणीय स्वीकृति हेतु लोक-सुनवाई के दौरान उपस्थित व्यक्तियों की सूची:

स्थान- अंचल कार्यालय, डेहरी, जिला-रोहतास दिनांक 18.06.2024 समय-01:30 P.M.

क्र.सं.	नाम	पता	हस्ताक्षर
1.	सूर्य प्रताप सिंह, आणप्रमो, अनुमंडल पदाधिकारी	डेहरी	
2.	आदित्य कुमार गुप्ता	श्री 14 पदार्थकारी किं० ७० ५० नि० ५० ६० ६०	
3.	अहमद आरिफ चौधरी	रवतून निरीक्षक रोहतास	
4.	शिव (CO DEH)	अंचल कार्यालय, डेहरी	
5.	Amir Akhtar	Lion Enviro	
6.	Vikash Kumar	BSPCB, Patna	
7.	Anil K Singh	Begusarai	
8.		Bhugusani	
9.	Baban Shandor	Nawada	
10.	Krishan Kumar	Barhiya	
11.	पवनो ज कु सिंह	चैनपुर	
12.	संजीव कुमार	गदुडिया	
13.	कौशिक देव शर्मा	बेरकप	
14.	पुनोद कुमार	चैनपुर	
15.	सुभाष कुमार	बेरकप	
16.	सुनिल कुमार शर्मा	बेरकप	

17	जयकिशोर सिंह		जयकिशोर सिंह
18	रंजन कुमार	डेहरी	Ranjay Kumar
19	विरेंद्र सोनी		Virendra Soni
20	गुणेश्वर सिंह		Guneswar Singh
21	सुरेंद्र सिंह		Suren Singh
22	राजय कुमार सिंह	डेहरी	Rajay Kumar Singh
23	पुरुषोत्तम कुमार	डेहरी	Purushottam Kumar
24	संजय सिंह	मंडकुडिया	Sanjay Singh
25	संजय सिंह	मंडकुडिया	Sanjay Singh
26	सोनी कुमार	चंडनपुर	Soni Kumar
27	Vikram Kumar	डेहरी	Vikram Kumar
28	राज कुमार	चंडनपुर	Raj Kumar
29	विष्णु गजपति	मंडकुडिया	Vishnu Gajapati
30	उज्जय कुमार	अजुन सिंगहा	Ujjay Kumar
31	संजय कुमार	मंडकुडिया	Sanjay Kumar
32	Deepak Kumar	Chandrapur	Deepak Kumar
33	Pradeep Kumar	Ramprasad	Pradeep Kumar
34	अशोक कुमार सिंह	अजुन सिंगहा	Ashok Kumar Singh
35	विकास कुमार सिंह	चंडनपुर	Vikas Kumar Singh
36	अमरेश कुमार सिंह	चंडनपुर	Amar Singh
37	सुनील कुमार सिंह	चंडनपुर	Sunil Kumar Singh

38	सोनी कुमार	बैरुप	~~रुप~~
39	अनिल कुमार सिंह	बैरुप	
40	अरुण कुमार	चैनपुर	~~रुप~~
41	बालीप कुमार	बैरुप	
42	विशुन सिंह	चैनपुर	
43	Md. Jaffer Hussain	Bharkunpur	
44	मालवी सिंह	चैनपुर	
45	शर्मा	चैनपुर	
46	शुभचंद सिंह	चैनपुर	
47	महेन्द्र सिंह	चैनपुर	
48	अरुण कुमार	म-चैनपुर	
49	Jai Shankar	Changpur	
50	अरुण कुमार	चैनपुर	~~रुप~~
51	अरुण कुमार	भरकुडिया	
52	सोनी कुमार	भरकुडिया	Sony Kumar
53	कन्हैया कुमार	भरकुडिया	
54	सोनी कुमार	चैनपुर	
55	अरुण कुमार	भरकुडिया	
56	राजेश कुमार	हुडडी	राजेश कुमार
57	अरुण कुमार	हुडडी	
58	विजय कुमार	हुडडी	

59	ଅବସ୍ଥା (ବି)	ପ୍ରଶ୍ନ	ଅବସ୍ଥା (ବି)
60			
61			
62			
63			
64			
65			
66			
67			
68			
69			
70			
71			
72			
73			
74			
75			
76			
77			
78			
79			

5

बिहार राज्य प्रदूषण नियंत्रण पर्यट

परिदेश मन्त्र, कार्बनियुक्त औद्योगिक क्षेत्र, पटना-800 019

दूरभाष नं: 0612-2261250/2262206, फैक्स 0612-2261060

E-mail: msbpcb-bihar@gov.in, वेबसाइट: http://msbpcb-bihar.gov.in

लोक-सुनवाई की सूचना

वेबसाइट इकोस्टेट ट्रेडर्स लिमिटेड, निदेशक-बी. जगन् कुमार, मुटौरिया, पिन-80, बनुरामनगर, मुटौरिया, 10 रूड नं. 1, आयनर हेरिटेज, 7वीं मंजिल कमरा नंबर-701-बी, कोलकाता द्वारा रोहतास सोन-11A बायु घाट, भोज-बरकप, ब्लॉक-बेहरी, जिला-रोहतास में बायु खनन परियोजना से संबंधित प्रस्ताव प्राप्त है। इस परियोजना के पर्यावरणीय स्वीकृति हेतु पर्यावरण, वन एवं जलवायु परिवर्तन मंत्रालय, भारत सरकार को ई.आई.ए. अधिसूचना संख्या एस.ओ. 1533, दिनांक 14.09.2008 तथा संशोधित, के आलोक में परियोजना को TOR (Terms of Reference) निर्धारित किया गया है तथा लोक-सुनवाई की जानी है।

परियोजना का पर्यावरण प्रभाव मूल्यांकन प्रतिवेदन तैयार किया गया है जिसमें सम्भावित कुप्रभावों को निरस्त करने के उपाय प्रस्तावित हैं। उक्त प्रतिवेदन तथा परियोजना के कार्यपालक सार की प्रति पर्यट मुख्यालय, पटना, जिला पदाधिकारी, जिला-रोहतास, कार्यपालक पदाधिकारी, जिला परिषद, जिला-रोहतास, जिला उद्योग केंद्र, जिला-रोहतास, जिला जनन कार्यालय, रोहतास के कार्यालय में प्रकाशित क्षेत्र के लोगों के अवलोकनार्थ उपलब्ध है। परियोजना की विवरणी का अवलोकन पर्यट के वेबसाइट <http://msbpcb-bihar.gov.in> पर भी किया जा सकता है। वैसे व्यक्ति जो इस परियोजना से प्रभावित होने वाले हैं, अपना लिखित सुझाव/विचार एवं मत व्यक्त इस सूचना प्रकाशन के 30 दिनों के अन्दर पर्यट कार्यालय में जमा कर सकते हैं। साथ ही पर्यट के ई.मेल msbpcb-bihar@gov.in अथवा डाक से माध्यम से भी लिखित सुझाव/विचार एवं मत व्यक्त भेजी जा सकती है।

परियोजना प्रभाव क्षेत्र के नागरिकों के लिए लोक-सुनवाई निम्नानुसार आहूत किया गया है-

दिनांक	समय	अवकाश का नाम	बायु घाट का नौका	बायु घाट का नाम	लोक-सुनवाई का स्थल
18.06.2024	अपराह्न 01:30 बजे	बेहरी	भोज-बरकप	रोहतास सोन-11A बायु घाट	अवकाश कार्यालय, बेहरी, जिला-रोहतास

सभी आम लोगों/संबंधितों से अनुरोध है कि उपरोक्त लोक-सुनवाई के दौरान सरकार द्वारा निर्गत कोविड-19 गाइड लाइन का पालन करते हुए परियोजना के संबंध में अपने मत/सुझाव/विचार से अवगत करावेंगे।

PR. No. 0651 (B&C) 2024-25 सचिव

उक्त सूचना www.state.bihar.gov.in/prdbihar पर भी देखी जा सकती है।

लोकसभा आम निर्वाचन 2024- मतदान का महात्योहार, बिहार है तैयार।

बिहार राज्य प्रदूषण नियंत्रण पर्यट

परिदेश मन्त्र, कार्बनियुक्त औद्योगिक क्षेत्र, पटना-800 019

दूरभाष नं: 0612-2261250/2262206, फैक्स 0612-2261060

E-mail: msbpcb-bihar@gov.in, वेबसाइट: http://msbpcb-bihar.gov.in

लोक-सुनवाई की सूचना

वेबसाइट इकोस्टेट ट्रेडर्स लिमिटेड, निदेशक-बी. जगन् कुमार, मुटौरिया, पिन-80, बनुरामनगर, मुटौरिया, 10 रूड नं. 1, आयनर हेरिटेज, 7वीं मंजिल कमरा नंबर-701-बी, कोलकाता द्वारा रोहतास सोन-11A बायु घाट, भोज-बरकप, ब्लॉक-बेहरी, जिला-रोहतास में बायु खनन परियोजना से संबंधित प्रस्ताव प्राप्त है। इस परियोजना के पर्यावरण के पूर्व पर्यावरणीय स्वीकृति हेतु पर्यावरण, वन एवं जलवायु परिवर्तन मंत्रालय, भारत सरकार को ई.आई.ए. अधिसूचना संख्या एस.ओ. 1533, दिनांक 14.09.2008 तथा संशोधित, के आलोक में परियोजना को TOR (Terms of Reference) निर्धारित किया गया है तथा लोक-सुनवाई की जानी है।

परियोजना का पर्यावरण प्रभाव मूल्यांकन प्रतिवेदन तैयार किया गया है जिसमें सम्भावित कुप्रभावों को निरस्त करने के उपाय प्रस्तावित हैं। उक्त प्रतिवेदन तथा परियोजना के कार्यपालक सार की प्रति पर्यट मुख्यालय, पटना, जिला पदाधिकारी, जिला-रोहतास, कार्यपालक पदाधिकारी, जिला परिषद, जिला-रोहतास, जिला उद्योग केंद्र, जिला-रोहतास, जिला जनन कार्यालय, रोहतास के कार्यालय में प्रकाशित क्षेत्र के लोगों के अवलोकनार्थ उपलब्ध है। परियोजना की विवरणी का अवलोकन पर्यट के वेबसाइट <http://msbpcb-bihar.gov.in> पर भी किया जा सकता है। वैसे व्यक्ति जो इस परियोजना से प्रभावित होने वाले हैं, अपना लिखित सुझाव/विचार एवं मत व्यक्त इस सूचना प्रकाशन के 30 दिनों के अन्दर पर्यट कार्यालय में जमा कर सकते हैं। साथ ही पर्यट के ई.मेल msbpcb-bihar@gov.in अथवा डाक से माध्यम से भी लिखित सुझाव/विचार एवं मत व्यक्त भेजी जा सकती है।

परियोजना प्रभाव क्षेत्र के नागरिकों के लिए लोक-सुनवाई निम्नानुसार आहूत किया गया है-

दिनांक	समय	अवकाश का नाम	बायु घाट का नौका	बायु घाट का नाम	लोक-सुनवाई का स्थल
18.06.2024	अपराह्न 01:30 बजे	बेहरी	भोज-बरकप	रोहतास सोन-11A बायु घाट	अवकाश कार्यालय, बेहरी, जिला-रोहतास

सभी आम लोगों/संबंधितों से अनुरोध है कि उपरोक्त लोक-सुनवाई के दौरान सरकार द्वारा निर्गत कोविड-19 गाइड लाइन का पालन करते हुए परियोजना के संबंध में अपने मत/सुझाव/विचार से अवगत करावेंगे।

PR. No. 0651 (B&C) 2024-25 सचिव

उक्त सूचना www.state.bihar.gov.in/prdbihar पर भी देखी जा सकती है।

लोकसभा आम निर्वाचन 2024- मतदान का महात्योहार, बिहार है तैयार।

Annexure –IV
Terms of Reference (ToR)



File No.: SIA/1(a)/2510/2024

Government of India

Ministry of Environment, Forest and Climate Change

(Issued by the State Level Expert Appraisal Committee(SEAC), BIHAR)



Dated 06/03/2024



To,

KARAN KUMAR BHUTORIA
INNOCENT TRADERS LIMITED
16 STRAND ROAD, DIAMOND HERITAGE, 7TH FLOOR, ROOM NO. 701-D, KOLKATA,
KOLKATA, WEST BENGAL, 700001
innocenttraders123@gmail.com

Subject: Grant of Standard Terms of Reference (ToR) to the proposed Project under the EIA Notification 2006-
and as amended thereof-regarding.

Sir/Madam,

This is in reference to your application submitted to SEAC vide proposal number
SIA/BR/MIN/464360/2024 dated 28/02/2024 for grant of Terms of Reference (ToR) to the project
under the provision of the EIA Notification 2006-and as amended thereof.

2. The particulars of the proposal are as below :

(i) ToR Identification No.	TO24B0107BR5890596N
(ii) File No.	SIA/1(a)/2510/2024
(iii) Clearance Type	Fresh ToR
(iv) Category	B1
(v) Project/Activity Included Schedule No.	1(a) Mining of minerals
(vii) Name of Project	Proposed Sand Mining Project of Area 48.0 Ha at Rohtas Sone -11A Sand Ghat on Sone River of District- Rohtas of State-Bihar
(viii) Name of Company/Organization	INNOCENT TRADERS LIMITED
(ix) Location of Project (District, State)	ROHTAS, BIHAR
(x) Issuing Authority	SEAC
(xii) Applicability of General Conditions	NO

3. The SEAC has examined the proposal in accordance with the Environment Impact Assessment (EIA) Notification, 2006 & further amendments thereto and after detailed examination hereby decided to grant Standard Terms of Reference to the instant proposal of M/s. INNOCENT TRADERS LIMITED under the provisions of the

aforementioned Notification.

4. The brief about products and by products as submitted by the Project proponent in Form-1 (Part A, B) and Standard Terms of Reference are annexed to this letter as Annexure (1).
5. The SEIAA,Bihar reserves the right to stipulate additional TORs, if found necessary.
6. The Standard Terms of Reference (ToR) to the aforementioned project is under provisions of EIA Notification, 2006 and as amended thereof. It does not tantamount to approvals/consent/permissions etc required to be obtained under any other Act/Rule/regulation. The Project Proponent is under obligation to obtain approvals /clearances under any other Acts/ Regulations or Statutes, as applicable, to the project.
7. The granted letter, all the documents submitted as a part of application viz. Form-1 Part A and Part B are available on PARIVESH portal which can be accessed by scanning the QR Code above.

Copy To

1. Member Secretary, State Environment Impact Assessment Authority, Bihar.
2. Member Secretary, Bihar State Pollution Control Board, Patna.
3. Director, Department of Mines and Geology, Govt. of Bihar, Patna.
4. Guard File

Annexure 2

Details of Products & By-products

Name of the product /By-product	Product / By-product	Quantity	Unit	Mode of Transport / Transmission	Remarks (eg. CAS number)
Sand	Product	1555200	Tons per Annum (TPA)	Road	NA

A. STANDARD TERMS OF REFERENCE

1. Year-wise production details since 1994 should be given, clearly stating the highest production achieved in any one year prior to 1994. It may also be categorically informed whether there had been any increase in production after the EIA Notification 1994 came into force, w.r.t. the highest production achieved prior to 1994.
2. A copy of the document in support of the fact that the Proponent is the rightful lessee of the mine should be given.
3. All documents including approved mine plan, EIA and Public Hearing should be compatible with one another in terms of the mine lease area, production levels, waste generation and its management, mining technology etc. and should be in the name of the lessee.
4. All corner coordinates of the mine lease area, superimposed on a High Resolution Imagery/ toposheet, topographic sheet, geomorphology and geology of the area should be provided. Such an Imagery of the proposed area should clearly show the land use and other ecological features of the study area (core and buffer zone).
5. Information should be provided in Survey of India Toposheet in 1:50,000 scale indicating geological map of the area, geomorphology of land forms of the area, existing minerals and mining history of the area, important water bodies, streams and rivers and soil characteristics.
6. Details about the land proposed for mining activities should be given with information as to whether mining conforms to the land use policy of the State; land diversion for mining should have approval from State land use board or the concerned authority.
7. It should be clearly stated whether the proponent Company has a well laid down Environment Policy approved by its Board of Directors? If so, it may be spelt out in the EIA Report with description of the prescribed operating process/procedures to bring into focus any infringement/deviation/violation of the environmental or forest norms/conditions? The hierarchical system or administrative e-order of the Company to deal with the environmental issues and for ensuring compliance with the EC conditions may

also be given. The system of reporting of non-compliances / violations of environmental norms to the Board of Directors of the Company and/or shareholders or stakeholders at large, may also be detailed in the EIA Report.

8. Issues relating to Mine Safety, including subsidence study in case of underground mining and slope study in case of open cast mining, blasting study etc. should be detailed. The proposed safeguard measures in each case should also be provided.
9. The study area will comprise of 10 km zone around the mine lease from lease periphery and the data contained in the EIA.
10. Land use of the study area delineating forest area, agricultural land, grazing land, wildlife sanctuary, national park, migratory routes of fauna, water bodies, human settlements and other ecological features should be indicated. Land use plan of the mine lease area should be prepared to encompass preoperational, operational and post operational phases and submitted. Impact, if any, of change of land use should be given.
11. Details of the land for any Over Burden Dumps outside the mine lease, such as extent of land area, distance from mine lease, its land use, R&R issues, if any, should be given.
12. A Certificate from the Competent Authority in the State Forest Department should be provided, confirming the involvement of forest land, if any, in the project area. In the event of any contrary claim by the Project Proponent regarding the status of forests, the site may be inspected by the State Forest Department along with the Regional Office of the Ministry to ascertain the status of forests, based on which, the Certificate in this regard as mentioned above be issued. In all such cases, it would be desirable for representative of the State Forest Department to assist the Expert Appraisal Committees.
13. Status of forestry clearance for the broken up area and virgin forestland involved in the Project including deposition of net present value (NPV) and compensatory afforestation (CA) should be indicated. A copy of the forestry clearance should also be furnished.

14. Implementation status of recognition of forest rights under the Scheduled Tribes and other Traditional Forest Dwellers (Recognition of Forest Rights) Act, 2006 should be indicated.
15. The vegetation in the RF / PF areas in the study area, with necessary details, should be given.
16. A study shall be got done to ascertain the impact of the Mining Project on wildlife of the study area and details furnished. Impact of the project on the wildlife in the surrounding and any other protected area and accordingly, detailed mitigative measures required, should be worked out with cost implications and submitted.
17. Location of National Parks, Sanctuaries, Biosphere Reserves, Wildlife Corridors, Ramsar site Tiger/Elephant Reserves/(existing as well as proposed), if any, within 10 km of the mine lease should be clearly indicated, supported by a location map duly authenticated by Chief Wildlife Warden. Necessary clearance, as may be applicable to such projects due to proximity of the ecologically sensitive areas as mentioned above, should be obtained from the Standing Committee of National Board of Wildlife and copy furnished.
18. A detailed biological study of the study area [core zone and buffer zone (10 km radius of the periphery of the mine lease)] shall be carried out. Details of flora and fauna, endangered, endemic and Rare Endangered and Threatened (RET) Species duly authenticated, separately for core and buffer zone should be furnished based on such primary field survey, clearly indicating the Schedule of the fauna present. In case of any scheduled-I fauna found in the study area, the necessary plan along with budgetary provisions for their conservation should be prepared in consultation with State Forest and Wildlife Department and details furnished. Necessary allocation of funds for implementing the same should be made as part of the project cost.
19. Proximity to Areas declared as 'Critically Polluted' or the Project areas attracting court restrictions for mining operations, should also be indicated and where so required, clearance certifications from the prescribed Authorities, such as the SPCB or State Mining Dept. Should be secured and furnished to the effect that the proposed mining activities could be considered.

20. R&R Plan/compensation details for the Project Affected People (PAP) should be furnished. While preparing the R&R Plan, the relevant State/National Rehabilitation & Resettlement Policy should be kept in view. In respect of SCs /STs and other weaker sections of the society in the study area, anteed based sample survey, family-wise, should be undertaken to assess their requirements, and action programmers prepared and submitted accordingly, integrating the sectoral programmers offline departments of the State Government. It may be clearly brought out whether the village(s) located in the mine lease area will be shifted or not. The issues relating to shifting of village(s) including their R&R and socio-economic aspects should be discussed in the Report.
21. One season (non-monsoon) primary baseline data on ambient air quality as per CPCB Notification of 2009, water quality, noise level, soil and flora and fauna shall be collected and the AAQ and other data so compiled presented date-wise in the EIA and EMP Report. Site specific meteorological data should also be collected. The location of the monitoring stations should be such as to represent whole of the study area and justified keeping in view the pre-dominant downwind direction and location of sensitive receptors. There should be at least one monitoring station within 500 m of the mine lease in the pre-dominant downwind direction. The mineralogical composition of PM₁₀, particularly for free silica, should be given.
22. Air quality modeling should be carried out for prediction of impact of the project on the air quality of the area. It should also take into account the impact of movement of vehicles for transportation of mineral. Details of the model used and input parameters used for modeling should be provided for both mining and non-mining scenario. The air quality contours should be shown on a location map clearly indicating the location of the site, location of sensitive receptors, and the habitation. The wind roses showing pre-dominant wind direction also be indicated on the map.
23. The water requirement for the Project, its availability and source should be furnished. A detailed water balance should also be provided. Fresh water requirement for the Project should be indicated.

24. Necessary clearance from the Competent Authority for drawl of requisite quantity of water for the Project should be provided.
25. Description of water conservation measures proposed to be adopted in the Project should be given.
26. Impact of the Project on the water quality, both surface and groundwater, should be assessed and necessary safeguard measures, if any required, should be provided.
27. Impact of the Project on the water quality, both surface and groundwater, should be assessed and necessary safeguard measures, if any required, should be provided.
28. Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided. In case the working will intersect groundwater table, a detailed Hydro Geological Study should be undertaken and Report furnished. The Report inter-alia, shall include details of the aquifers present and impact of mining activities on these aquifers. Necessary permission from Central Ground Water Authority for working below ground water and for pumping of ground water should also be obtained and copy furnished.
29. Details of any stream, seasonal or otherwise, passing through the lease area and modification /diversion proposed, if any, and the impact of the same on the hydrology should be brought out.
30. Information on site elevation, working depth, groundwater table etc. Should be provided both in AMSL and bgl. A schematic diagram may also be provided for the same.
31. A time bound Progressive Greenbelt Development Plan shall be prepared in a tabular form (indicating the linear and quantitative coverage, plant species and time frame) and submitted, keeping in mind, the same will have to be executed up front on commencement of the Project. Phase-wise plan of plantation and compensatory a forestation should be charted clearly indicating the area to be covered under plantation and the species to be planted. The details of plantation already done should be given. The plant species selected for green belt should have greater ecological value and should be of

good utility value to the local population with emphasis on local and native species and the species which are tolerant to pollution.

32. Impact on local transport infrastructure due to the Project should be indicated. Projected increase in truck / tractor and other vehicular traffic as a result of the Project in the present road network (including those outside the Project area) should be worked out, indicating whether it is capable of handling the incremental load. Arrangement for improving the infrastructure, if contemplated (including action to be taken by other agencies such as State Government) should be covered. Project Proponent shall conduct Impact of Transportation study as per Indian Road Congress Guidelines.
33. Details of the onsite shelter and facilities to be provided to the mine workers should be included in the EIA Report.
34. Conceptual post mining land use and Reclamation and Restoration of mined out areas (with plans and with adequate number of sections) should be given in the EIA report.
35. Occupational Health impacts of the Project should be anticipated and the proposed preventive measures spelt out in detail. Details of pre-placement medical examination and periodical medical examination schedules should be incorporated in the EMP. The project specific occupational health mitigation measures with required facilities proposed in the mining area may be detailed.
36. Public health implications of the Project and related activities for the population in the impact zone should be systematically evaluated and the proposed remedial measures should be detailed along with budgetary allocations.
37. Measures of socio economic significance and influence to the local community proposed to be provided by the Project Proponent should be indicated. As far as possible, quantitative dimensions may be given with time frames for implementation.
38. Detailed environmental management plan (EMP) to mitigate the environmental impacts which, should inter-alia include the impacts of change of land use, loss of agricultural and grazing land, if any, occupational health impacts besides other impacts specific to the proposed Project.

39. Public Hearing points raised and commitment of the Project Proponent on the same along with time bound Action Plan with budgetary provisions to implement the same should be provided and also incorporated in the final EIA/EMP Report of the Project.
40. Details of litigation pending against the project, if any, with direction /order passed by any Court of Law against the Project should be given.
41. The cost of the Project (capital cost and recurring cost) as well as the cost towards implementation of EMP should be clearly spelt out.
42. A Disaster management Plan shall be prepared and included in the EIA/EMP Report.
43. Benefits of the Project if the Project is implemented should be spelt out. The benefits of the Project shall clearly indicate environmental, social, economic, employment potential, etc.
44. Besides the above, the below mentioned general points are also to be followed:-
 - a) All documents to be properly referenced with index and continuous page numbering.
 - b) Where data are presented in the Report especially in Tables, the period in which the data were collected and the sources should be indicated.
 - c) Project Proponent shall enclose all the analysis/testing reports of water, air, soil, noise etc. using the MoEF&CC/NABL accredited laboratories. All the original analysis/testing reports should be available during appraisal of the Project.
 - d) Where the documents provided are in a language other than English, an English translation should be provided.
 - e) The Questionnaire for environmental appraisal of mining projects as devised earlier by the Ministry shall also be filled and submitted.
 - f) While preparing the EIA report, the instructions for the Proponents and instructions for the Consultants issued by MoEF vide O.M. No. J-11013/41/2006-IA.II(I) dated 4th August, 2009, which are available on the website of this Ministry, should be followed.

- g) Changes, if any made in the basic scope and project parameters (as submitted in Form-I and the PFR for securing the TOR) should be brought to the attention of MoEF&CC with reasons for such changes and permission should be sought, as the TOR may also have to be altered. Post Public Hearing changes in structure and content of the draft EIA/EMP (other than modifications arising out of the P.H. process) will entail conducting the PH again with the revised documentation.
- h) As per the circular no. J-11011/618/2010-IA.II(I) dated 30.5.2012, certified report of the status of compliance of the conditions stipulated in the Environment Clearance for the existing operations of the project, should be obtained from the Regional Office of Ministry of Environment, Forest and Climate Change, as may be applicable.
- i) The EIA report should also include (i) surface plan of the area indicating contours of main topographic features, drainage and mining area, (ii) geological maps and sections and (iii) sections of the mine pit and external dumps, if any, clearly showing the land features of the adjoining area.

B. Additional Conditions:-

1. Submit a report based on a cumulative assessment of the increase in air pollutants due to the increase in traffic load in view of proposed mining activities on all the roads located within an aerial distance of 10 km using a suitable air model.
2. If the proposed mining lease has overlapping areas with the previously allotted mining lease or already working or worked out mining lease, the same should be clearly shown and details about the quantity of sand extracted from the overlapped area should be furnished duly certified by District Mining Officer.
3. The satellite imageries (high resolution) of the last three years for the summer, rainy, and winter seasons of each proposed mining lease shall be submitted.
4. Submit a map on an appropriate scale to show extraction paths to be used outside the mining lease boundary to approach major public roads (Rural/District road or

State/National Highway). An alternative route shall be explored if the extraction path is passing through dense population/ human settlements. Also, submit a cumulative traffic management plan for the cluster sand mining proposal.

5. Submit a map of the area falling within a 2.5 km radius from the boundary of each mining lease showing all man-made public utility features such as bridge/public civil structures (including water intake points), culverts etc., and highways, a table showing a distance of the above mentioned man-made features from the mining lease boundary to facilitate decision making pertaining to relevant rules / Guidelines.
6. Submit a report of the cumulative EIA/EMP study for the cluster sand mining blocks of the proposed mining site.

Copy, through email, for information and necessary actions to:-

1. Member Secretary, State Environment Impact Assessment Authority, Bihar.
2. Member Secretary, Bihar State Pollution Control Board, Patna.
3. Director, Department of Mines and Geology, Govt. of Bihar, Patna.
4. Guard File.



Annexure – V
(Satellite Imagery Last 3 Years)





ROHTAS SONE-11A

SATELLITE IMAGERY DATE: 06/2025

Legend

Google Earth



ROHTAS SONE-11A

SATELLITE IMAGE // DATE: 04/2023

Legend



ROHTAS SONE-11A
SATELLITE IMAGE / DATE: 03/2008

Legend

Champur

11A

Google Earth

Annexure –VI
(Letter from DMO, Rohtas)

जिला खनन कार्यालय, रोहतास (सासाराम)।

प्रेषित,

पत्रांक-1015 / एम0, सासाराम, दिनांक-29-06-24

इनोसेन्ट ट्रेडर्स लि0 (ब्लॉक-11A)

निदेशक-करण कुमार भुटोरियों

पिता-हनुमान मल भुटोरियों

पता-16 Strand Road, Diamond Heritage,

7th Floor Room No-701-D Kolkata-700001

ई-मेल innocenttradersltd@gmail.com

विषय:-

रोहतास जिलान्तर्गत सोन बालूघाट/ब्लॉक संख्या-11A, रकबा-48 हे0 क्षेत्र पर पूर्व से खनन/प्रेषण की विवरणी उपलब्ध कराने के संबंध में।

प्रसंग:-

आपका पत्रांक-शून्य, दिनांक-29.06.2024

उपर्युक्त विषयक आपको प्रासंगिक पत्र के क्रम में आपके राज्य पर्यावरण समाधान निर्धारण प्राधिकार (SEIAA) बिहार, पटना द्वारा निर्गत TOR के Additional Specific Condition No-02 के आलोक में सूचित किया जाता है कि विषयांकित सोन बालूघाट/ब्लॉक संख्या-11A में दिनांक-01.10.2022 से 30.06.2023 तक खनन/प्रेषण की मात्रा शून्य है।

अनुलग्नक:-Overlapping का मानचित्र।


29-06-24
सहायक निदेशक,
खान एवं भूतत्व,
रोहतास, सासाराम।

29-06-24



Legend

- PROPOSED GHAT
- OLD GHAT

PROPOSED GHAT AREA: 48.0 Ha.

OVERLAPPED AREA: 0 Ha.

**PROJECT: ROHTAS SON
-11A
AREA: 48.0 HA.
RIVER: SONE**

Annexure –VII
(Monitoring reports)



TEST REPORT

TEST REPORT NO : ETS/901/03/2023

DATE OF REPORT : 10.03.2023

AMBIENT AIR QUALITY MONITORING AND ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Analysis Start Date : 10.12.2022
Analysis End Date : 05.03.2023
Sampling Done By : ETS STAFF
Sampling Location : PROJECT SITE
Sampling Method : ETS/STP/AIR-01
Sampling Machine Placed At Height : 1.5 MTR. (FROM GROUND)
Weather Condition : CLEAR

Test Parameters			Particulate Matter(PM10)	Particulate Matter(PM2.5)	Sulphur Dioxide(SO2)	Nitrogen Dioxide(NO2)	Carbon Monoxide(CO)
Unit			µg/m3	µg/m3	µg/m3	µg/m3	mg/m3
Limit (as Per CPCB)			24 Hrs.=100	24 Hrs.=60	24 Hrs.=80	24 Hrs.=80	1 Hrs.=04
Test Method			IS 5182 (Part-23)	ETS/STP/AIR-03	IS: 5182 (Part-2)	IS: 5182 (Part-6)	IS 5182 (Part-10)
Sl.N.	Monitoring Date	Sample ID	Test Results				
1	07.12.2022	ETS/DI-01	75.1	37.3	12.9	19.9	0.55
2	10.12.2022	ETS/DI-02	80.6	40.4	12.2	22.3	0.62
3	12.12.2022	ETS/DI-03	77.1	36.3	13.4	15.6	0.56
4	15.12.2022	ETS/DI-04	71.1	34.4	12.4	17.9	0.63
5	19.12.2022	ETS/DI-05	77.3	40.7	16.1	22.4	0.54
6	22.12.2022	ETS/DI-06	79.2	40.0	14.6	21.3	0.72
7	26.12.2022	ETS/DI-07	73.5	37.3	12.8	18.1	0.85
8	30.12.2022	ETS/DI-08	81.7	40.7	16.4	22.1	0.79
9	03.01.2023	ETS/DI-09	79.4	44.0	15.2	21.9	0.66
10	06.01.2023	ETS/DI-10	81.3	45.5	14.3	21.2	0.87
11	10.01.2023	ETS/DI-11	71.3	37.3	15.5	18.8	0.92
12	13.01.2023	ETS/DI-12	70.7	38.5	13.2	19.5	0.96
13	17.01.2023	ETS/DI-13	67.7	37.8	14.1	18.4	0.65
14	20.01.2023	ETS/DI-14	72.0	41.0	10.2	21.5	0.63
15	23.01.2023	ETS/DI-15	69.6	37.3	15.8	18.0	0.76
16	27.01.2023	ETS/DI-16	70.6	37.9	15.9	18.5	1.79
17	03.02.2023	ETS/DI-17	74.2	37.0	12.7	17.5	1.13
18	07.02.2023	ETS/DI-18	76.4	37.5	13.3	20.8	1.15
19	10.02.2023	ETS/DI-19	72.5	38.2	13.4	19.2	1.71
20	13.02.2023	ETS/DI-20	78.9	39.8	11.5	21.0	0.83
21	17.02.2023	ETS/DI-21	72.0	38.5	13.4	23.7	1.56
22	20.02.2023	ETS/DI-22	76.3	39.5	14.3	25.4	0.69
23	26.02.2023	ETS/DI-23	72.1	37.0	13.5	17.6	0.85
24	03.03.2023	ETS/DI-24	73.7	37.2	16.0	18.3	1.25
Minimum			67.7	34.4	10.2	15.6	0.54
Maximum			81.7	45.5	16.4	25.4	1.79
Average			74.8	38.8	13.9	20.0	0.90
98 PERCENTILE			81.5	44.8	16.3	24.6	1.75

****End of Test Report****



Page 1 of 1

For Enviro-Tech Services

AUTHORIZED SIGNATORY
Pushkar Mittal
Lab in-charge

Note:-

1. Test reports without ETS-LAB LOGOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



ETS-LAB

ENVIRO-TECH SERVICES

An Analytical Laboratory



ISO 45001

(A GOVERNMENT APPROVED LAB)

Plot No. 1/32, S.S. of G.T. Road Industrial Area, Ghaziabad (U.P.) - 201001

email : etslab2012@gmail.com | Website : www.etslab.in | Ph.: 9911516076, 9811736063



TEST REPORT

TEST REPORT NO : ETS/4258/12/2022

DATE OF REPORT : 10.03.2023

AMBIENT AIR QUALITY MONITORING AND ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Analysis Start Date : 10.12.2022

Analysis End Date : 05.03.2023

Sampling Done By : ETS STAFF

Sampling Location : BERKAP

Sampling Method : ETS/STP/AIR-01

Sampling Machine Placed At Height : 1.5 MTR. (FROM GROUND)

Weather Condition : CLEAR

Test Parameters			Particulate Matter(PM10)	Particulate Matter(PM2.5)	Sulphur Dioxide(SO2)	Nitrogen Dioxide(NO2)	Carbon Monoxide(CO)
Unit			µg/m3	µg/m3	µg/m3	µg/m3	mg/m3
Limit (as Per CPCB)			24 Hrs.=100	24 Hrs.=60	24 Hrs.=80	24 Hrs.=80	1 Hrs.=04
Test Method			IS 5182 (Part-23)	ETS/STP/AIR-03	IS: 5182 (Part-2)	IS: 5182 (Part-6)	IS 5182 (Part-10)
S.N.	Monitoring Date	Sample ID	Test Results				
1	07.12.2022	ETS/DI-01	78.1	38.8	9.0	20.7	0.47
2	10.12.2022	ETS/DI-02	83.8	42.0	8.5	23.2	0.25
3	12.12.2022	ETS/DI-03	80.2	37.8	9.4	16.2	0.73
4	15.12.2022	ETS/DI-04	73.9	35.8	8.7	18.6	0.85
5	19.12.2022	ETS/DI-05	80.4	42.3	11.3	23.3	0.42
6	22.12.2022	ETS/DI-06	82.4	41.6	10.2	22.2	0.84
7	26.12.2022	ETS/DI-07	76.4	38.8	9.0	18.8	0.73
8	30.12.2022	ETS/DI-08	85.0	42.3	11.5	23.0	0.54
9	03.01.2023	ETS/DI-09	82.6	45.8	10.6	22.8	0.80
10	06.01.2023	ETS/DI-10	84.6	47.3	10.0	22.0	0.82
11	10.01.2023	ETS/DI-11	74.2	38.8	10.9	19.6	0.65
12	13.01.2023	ETS/DI-12	73.5	40.0	9.2	20.3	0.63
13	17.01.2023	ETS/DI-13	70.4	39.3	9.9	19.1	0.33
14	20.01.2023	ETS/DI-14	74.9	42.6	7.1	22.4	0.42
15	23.01.2023	ETS/DI-15	72.4	38.8	11.1	18.7	0.75
16	27.01.2023	ETS/DI-16	73.4	39.4	11.1	19.2	0.33
17	03.02.2023	ETS/DI-17	77.2	38.5	8.9	18.2	0.83
18	07.02.2023	ETS/DI-18	79.5	39.0	9.3	21.6	0.68
19	10.02.2023	ETS/DI-19	75.4	39.7	9.4	20.0	0.73
20	13.02.2023	ETS/DI-20	82.1	41.4	8.1	21.8	0.38
21	17.02.2023	ETS/DI-21	74.9	40.0	9.4	24.6	0.73
22	20.02.2023	ETS/DI-22	79.4	41.1	10.0	26.4	0.78
23	26.02.2023	ETS/DI-23	75.0	38.5	9.5	18.3	0.88
24	03.03.2023	ETS/DI-24	76.6	38.7	11.2	19.0	0.43
Minimum			70.4	35.8	7.1	16.2	0.25
Maximum			85.0	47.3	11.5	26.4	0.88
Average			77.8	40.3	9.7	20.8	0.62
98 PERCENTILE			84.8	46.6	11.4	25.6	0.87

****End of Test Report****

Page 1 of 1

For Enviro-Tech Services

Note:-

CHECKED BY

SHRADHA GUPTA

Format No ETS/LAB/IR-02, Issue No. 05, Date 01.04.2019, Amd. No. 04 Date 01.04.2019

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.

2. The results indicated only refer to the tested samples and listed applicable parameters.

3. No complaint will be entertained if received after 7 days of issue of test report.

4. Our liability is limited to invoice value only.

5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.

6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

AUTHORIZED SIGNATORY

Lab in-charge



ETS-LAB

ENVIRO-TECH SERVICES

An Analytical Laboratory



ISO 45001

(A GOVERNMENT APPROVED LAB)

Plot No. 1/32, S.S. of G.T. Road Industrial Area, Ghaziabad (U.P.) - 201001

email : etslab2012@gmail.com | Website : www.etslab.in | Ph.: 9911516076, 9811736063



TEST REPORT

TEST REPORT NO : ETS/4259/12/2022

DATE OF REPORT : 10.03.2023

AMBIENT AIR QUALITY MONITORING AND ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Analysis Start Date : 12.12.2022

Analysis End Date : 06.03.2023

Sampling Done By : ETS STAFF

Sampling Location : BANK

Sampling Method : ETS/STP/AIR-01

Sampling Machine Placed At Height : 1.5 MTR. (FROM GROUND)

Weather Condition : CLEAR

Test Parameters			Particulate Matter(PM10)	Particulate Matter(PM2.5)	Sulphur Dioxide(SO2)	Nitrogen Dioxide(NO2)	Carbon Monoxide(CO)
Unit			µg/m3	µg/m3	µg/m3	µg/m3	mg/m3
Limit (as Per CPCB)			24 Hrs.=100	24 Hrs.=60	24 Hrs.=80	24 Hrs.=80	1 Hrs.=04
Test Method			IS 5182 (Part-23)	ETS/STP/AIR-03	IS: 5182 (Part-2)	IS: 5182 (Part-6)	IS 5182 (Part-10)
Sl.N.	Monitoring Date	Sample ID	Test Results				
1	09.12.2022	ETS/DI-25	73.6	32.8	8.2	21.0	0.38
2	12.12.2022	ETS/DI-26	75.3	37.5	7.3	23.6	0.82
3	16.12.2022	ETS/DI-27	76.0	39.0	9.2	17.0	0.37
4	19.12.2022	ETS/DI-28	68.9	40.2	8.2	18.5	0.42
5	23.12.2022	ETS/DI-29	76.5	44.8	10.4	23.8	0.27
6	26.12.2022	ETS/DI-30	78.7	43.8	10.9	22.5	0.34
7	30.12.2022	ETS/DI-31	82.1	35.8	9.2	18.8	0.40
8	01.01.2023	ETS/DI-32	80.5	46.4	8.4	23.3	0.56
9	05.01.2023	ETS/DI-33	78.9	44.2	9.9	28.1	0.77
10	09.01.2023	ETS/DI-34	80.0	43.7	10.6	22.4	0.68
11	12.01.2023	ETS/DI-35	69.0	34.2	11.1	19.6	0.46
12	15.01.2023	ETS/DI-36	68.3	33.3	8.8	20.4	0.72
13	19.01.2023	ETS/DI-37	67.1	40.9	10.1	19.2	0.68
14	22.01.2023	ETS/DI-38	69.8	35.7	11.2	22.9	0.39
15	28.01.2023	ETS/DI-39	64.4	34.5	9.6	18.6	0.56
16	31.01.2023	ETS/DI-40	68.0	36.9	11.0	19.3	0.77
17	04.02.2023	ETS/DI-41	72.6	37.4	9.3	25.6	0.43
18	08.02.2023	ETS/DI-42	75.4	40.7	9.0	22.1	0.68
19	11.02.2023	ETS/DI-43	70.3	33.6	9.2	20.1	0.65
20	14.02.2023	ETS/DI-44	78.5	39.0	10.3	22.3	0.52
21	19.02.2023	ETS/DI-45	69.7	37.4	9.2	25.4	0.65
22	23.02.2023	ETS/DI-46	75.1	34.1	10.6	27.7	0.77
23	27.02.2023	ETS/DI-47	69.9	31.7	11.8	17.1	0.48
24	04.03.2023	ETS/DI-48	72.0	35.2	9.3	18.4	0.73
Minimum			64.4	31.7	7.3	17.0	0.27
Maximum			82.1	46.4	11.8	28.1	0.82
Average			73.4	38.0	9.7	21.6	0.56
98 PERCENTILE			81.4	45.7	11.5	27.9	0.80

****End of Test Report****



Page 1 of 1

For Enviro-Tech Services

Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

Pushkar Mittal
Authorized Signatory



ETS-LAB

ENVIRO-TECH SERVICES

An Analytical Laboratory



ISO 45001

(A GOVERNMENT APPROVED LAB)

Plot No. 1/32, S.S. of G.T. Road Industrial Area, Ghaziabad (U.P.) - 201001

email : etslab2012@gmail.com | Website : www.etslab.in | Ph.: 9911516076, 9811736063



TEST REPORT

TEST REPORT NO ETS/4260/12/2022

DATE OF REPORT : 10.03.2023

AMBIENT AIR QUALITY MONITORING AND ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Analysis Start Date : 10.12.2022

Analysis End Date : 05.03.2023

Sampling Done By : ETS STAFF

Sampling Location : DARIHAT

Sampling Method : ETS/STP/AIR-01

Sampling Machine Placed At Height : 1.5 MTR. (FROM GROUND)

Weather Condition : CLEAR

Test Parameters			Particulate Matter(PM10)	Particulate Matter(PM2.5)	Sulphur Dioxide(SO2)	Nitrogen Dioxide(NO2)	Carbon Monoxide(CO)
Unit			µg/m3	µg/m3	µg/m3	µg/m3	mg/m3
Limit (as Per CPCB)			24 Hrs.=100	24 Hrs.=60	24 Hrs.=80	24 Hrs.=80	1 Hrs.=04
Test Method			IS 5182 (Part-23)	ETS/STP/AIR-03	IS: 5182 (Part-2)	IS: 5182 (Part-6)	IS 5182 (Part-10)
S.N.	Monitoring Date	Sample ID	Test Results				
1	07.12.2022	ETS/DI-49	62.9	26.8	9.1	14.8	0.80
2	10.12.2022	ETS/DI-50	64.5	28.1	11.6	23.1	0.67
3	12.12.2022	ETS/DI-51	65.1	30.8	10.3	16.5	0.90
4	15.12.2022	ETS/DI-52	59.0	31.8	9.6	18.0	0.67
5	19.12.2022	ETS/DI-53	71.1	35.4	9.1	23.2	0.22
6	22.12.2022	ETS/DI-54	74.4	34.6	12.0	21.9	0.26
7	26.12.2022	ETS/DI-55	70.4	31.9	10.3	18.1	0.32
8	30.12.2022	ETS/DI-56	68.1	35.4	9.3	22.8	0.41
9	03.01.2023	ETS/DI-57	71.9	39.4	13.2	22.7	0.58
10	06.01.2023	ETS/DI-58	68.0	34.5	11.7	21.8	0.67
11	10.01.2023	ETS/DI-59	59.2	32.5	13.7	19.0	0.80
12	13.01.2023	ETS/DI-60	58.3	33.1	14.7	19.9	0.56
13	17.01.2023	ETS/DI-61	57.4	32.3	11.1	18.9	0.67
14	20.01.2023	ETS/DI-62	59.8	35.4	12.5	22.2	0.29
15	23.01.2023	ETS/DI-63	55.7	31.9	11.6	18.1	0.41
16	27.01.2023	ETS/DI-64	58.1	29.7	13.4	19.0	0.58
17	03.02.2023	ETS/DI-65	62.2	31.4	10.5	16.3	0.32
18	07.02.2023	ETS/DI-66	64.5	32.1	12.3	21.6	0.73
19	10.02.2023	ETS/DI-67	60.2	32.9	9.6	19.5	0.48
20	13.02.2023	ETS/DI-68	67.1	34.5	11.4	21.7	0.38
21	17.02.2023	ETS/DI-69	59.7	28.8	10.3	24.8	0.67
22	20.02.2023	ETS/DI-70	64.3	34.1	11.7	24.1	0.58
23	26.02.2023	ETS/DI-71	59.9	32.2	11.4	17.6	0.80
24	03.03.2023	ETS/DI-72	61.7	31.7	10.5	18.0	0.45
Minimum			55.7	26.8	9.1	14.8	0.22
Maximum			74.4	39.4	14.7	24.8	0.90
Average			63.5	32.6	11.3	20.2	0.55
98 PERCENTILE			73.2	37.6	14.3	24.5	0.85

****End of Test Report****

CHECKED BY
SHRADDHA GUPTA

Page 1 of 1

For Enviro-Tech Services

AUTHORIZED SIGNATORY
Law In-charge

Note:- Format No ETS/LAB/TR-02, Issue No. 05, Date 01.04.2019, Amd. No. 04 Date 01.04.2019

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



TEST REPORT

TEST REPORT NO : ETS/4261/12/2022

DATE OF REPORT : 10.03.2023

AMBIENT AIR QUALITY MONITORING AND ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Analysis Start Date : 12.12.2022

Analysis End Date : 06.03.2023

Sampling Done By : ETS STAFF

Sampling Location : BAGAH

Sampling Method : ETS/STP/AIR-01

Sampling Machine Placed At Height : 1.5 MTR. (FROM GROUND)

Weather Condition : CLEAR

Test Parameters			Particulate Matter(PM10)	Particulate Matter(PM2.5)	Sulphur Dioxide(SO ₂)	Nitrogen Dioxide(NO ₂)	Carbon Monoxide(CO)
Unit			µg/m ³	µg/m ³	µg/m ³	µg/m ³	mg/m ³
Limit (as Per CPCB)			24 Hrs.=100	24 Hrs.=60	24 Hrs.=80	24 Hrs.=80	1 Hrs.=04
Test Method			IS 5182 (Part-23)	ETS/STP/AIR-03	IS 5182 (Part-2)	IS 5182 (Part-6)	IS 5182 (Part-10)
S.N.	Monitoring Date	Sample ID	Test Results				
1	09.12.2022	ETS/DI-73	65.3	35.8	9.1	17.2	0.26
2	12.12.2022	ETS/DI-74	66.6	37.5	14.0	19.2	0.23
3	16.12.2022	ETS/DI-75	58.4	33.2	11.0	13.6	0.21
4	19.12.2022	ETS/DI-76	60.9	34.2	10.1	15.1	0.43
5	23.12.2022	ETS/DI-77	59.6	37.9	15.7	19.4	0.31
6	26.12.2022	ETS/DI-78	63.0	37.3	14.0	18.4	0.49
7	30.12.2022	ETS/DI-79	63.4	34.3	8.6	15.3	0.61
8	01.01.2023	ETS/DI-80	65.9	37.9	13.8	19.2	0.52
9	05.01.2023	ETS/DI-81	64.8	37.5	15.3	19.0	0.74
10	09.01.2023	ETS/DI-82	67.1	37.0	13.8	18.3	0.55
11	12.01.2023	ETS/DI-83	61.0	35.0	12.2	23.5	0.18
12	15.01.2023	ETS/DI-84	60.3	35.6	10.3	16.7	0.51
13	19.01.2023	ETS/DI-85	59.4	34.7	12.6	15.7	0.49
14	22.01.2023	ETS/DI-86	56.8	38.3	14.9	18.7	0.74
15	28.01.2023	ETS/DI-87	57.7	34.3	13.8	15.2	0.68
16	31.01.2023	ETS/DI-88	60.1	32.3	15.7	15.9	0.55
17	04.02.2023	ETS/DI-89	64.3	33.8	8.3	13.6	0.69
18	08.02.2023	ETS/DI-90	66.7	34.7	10.6	18.1	0.68
19	11.02.2023	ETS/DI-91	62.3	35.3	11.0	16.4	0.76
20	14.02.2023	ETS/DI-92	60.7	32.0	12.9	18.2	0.25
21	19.02.2023	ETS/DI-93	61.7	34.5	11.0	20.8	0.49
22	23.02.2023	ETS/DI-94	66.5	36.7	13.8	20.2	0.68
23	27.02.2023	ETS/DI-95	61.9	33.9	11.3	14.0	0.74
24	04.03.2023	ETS/DI-96	63.8	34.1	14.9	15.0	0.48
Minimum			56.8	32.0	8.3	13.6	0.18
Maximum			67.1	38.3	15.7	23.5	0.76
Average			62.4	35.3	12.4	17.4	0.51
98 PERCENTILE			66.9	38.1	15.7	22.2	0.75

****End of Test Report****



Note:-

CHECKED BY
SHRADDHA GUPTA

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.

2. The results indicated only refer to the tested samples and listed applicable parameters.

3. No complaint will be entertained if received after 7 days of issue of test report.

4. Our liability is limited to invoice value only.

5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.

6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

Pankaj Mittal
AUTHORIZED SIGNATORY

TEST REPORT

TEST REPORT NO : ETS/1684/03/2023

DATE OF REPORT : 10.03.2023

AMBIENT AIR QUALITY MONITORING AND ANALYSIS REPORT

Name And Address of Customer : AURANGABAD SONE 21 GHAT,
AREA: 87.92 HA. MAUZAVILL- GOTHALI, P.O- GOTHALI, P.S- GOTHALI,
BLOCK- BARUN, DISTRICT- AURANGABAD, BIHAR.

Analysis Start Date : 10.12.2022
Analysis End Date : 05.03.2023
Sampling Done By : ETS STAFF
Sampling Location : AAQ-1 GOTHALEE
Sampling Method : ETS/STP/AIR-01
Sampling Machine Placed At Height : 1.5 MTR. (FROM GROUND)
Weather Condition : CLEAR

Test Parameters			Particulate Matter(PM10)	Particulate Matter(PM2.5)	Sulphur Dioxide(SO2)	Nitrogen Dioxide(NO2)	Carbon Monoxide(CO)
Unit			µg/m3	µg/m3	µg/m3	µg/m3	mg/m3
Limit (as Per CPCB)			24 Hrs.=100	24 Hrs.=60	24 Hrs.=80	24 Hrs.=80	1 Hrs.=04
Test Method			IS 5182 (Part-23)	ETS/STP/AIR-03	IS: 5182 (Part-2)	IS: 5182 (Part-6)	IS 5182 (Part-10)
Sl.N.	Monitoring Date	Sample ID	Test Results				
1	07.12.2022	ETS/DI-01	92.5	49.9	15.2	22.1	1.45
2	10.12.2022	ETS/DI-02	91.5	50.8	12.6	24.5	0.78
3	12.12.2022	ETS/DI-03	88.9	51.8	11.5	25.7	2.26
4	15.12.2022	ETS/DI-04	82.5	50.7	12.5	23.9	1.45
5	19.12.2022	ETS/DI-05	89.5	49.2	14.0	26.5	1.29
6	22.12.2022	ETS/DI-06	87.2	49.6	14.7	25.8	2.60
7	26.12.2022	ETS/DI-07	93.1	50.2	12.9	25.4	2.24
8	30.12.2022	ETS/DI-08	89.6	46.9	11.2	23.7	1.67
9	03.01.2023	ETS/DI-09	85.1	46.1	14.2	22.3	2.46
10	06.01.2023	ETS/DI-10	85.6	42.5	14.7	26.5	2.52
11	10.01.2023	ETS/DI-11	88.4	42.7	15.5	26.5	2.00
12	13.01.2023	ETS/DI-12	85.2	45.4	16.6	25.8	1.94
13	17.01.2023	ETS/DI-13	84.0	48.1	14.3	26.8	1.01
14	20.01.2023	ETS/DI-14	86.5	50.8	17.9	27.9	1.29
15	23.01.2023	ETS/DI-15	89.7	51.0	12.7	30.0	2.10
16	27.01.2023	ETS/DI-16	87.7	50.0	11.5	28.7	1.01
17	03.02.2023	ETS/DI-17	85.7	50.5	14.3	31.1	2.57
18	07.02.2023	ETS/DI-18	84.6	52.0	13.9	26.7	2.10
19	10.02.2023	ETS/DI-19	91.2	50.0	11.3	27.6	2.26
20	13.02.2023	ETS/DI-20	84.4	51.7	12.1	27.1	1.17
21	17.02.2023	ETS/DI-21	85.6	50.1	15.8	25.4	2.26
22	20.02.2023	ETS/DI-22	88.7	51.3	14.3	27.6	2.44
23	26.02.2023	ETS/DI-23	87.3	46.7	15.5	26.1	2.42
24	03.03.2023	ETS/DI-24	90.7	45.2	13.1	23.8	1.32
Minimum			82.5	42.5	11.2	22.1	0.78
Maximum			93.1	52.0	17.9	31.1	2.60
Average			87.7	48.9	13.8	26.1	1.86
98 PERCENTILE			92.8	51.9	17.3	30.6	2.59

****End of Test Report****

For ENVIRO-TECH SERVICES

FOR ENVIRO-TECH SERVICES

Page 1 of 1

Note:-

1. Test reports are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

AUTHORIZED SIGNATORY

MD. MURAJ
Quality Manager

TEST REPORT

TEST REPORT NO : ETS/1685/03/2023

DATE OF REPORT : 10.03.2023

AMBIENT AIR QUALITY MONITORING AND ANALYSIS REPORT

Name And Address of Customer : AURANGABAD SONE 21 GHAT,
AREA: 87.92 HA. MAUZA/VILL- GOTHALI, P.O- GOTHALI, P.S- GOTHALI,
BLOCK- BARUN, DISTRICT- AURANGABAD, BIHAR.

Analysis Start Date : 12.12.2022

Analysis End Date : 06.03.2023

Sampling Done By : ETS STAFF

Sampling Location : AAQ-2 DHANAUTI

Sampling Method : ETS/STP/AIR-01

Sampling Machine Placed At Height : 1.5 MTR. (FROM GROUND)

Weather Condition : CLEAR

Test Parameters			Particulate Matter(PM10)	Particulate Matter(PM2.5)	Sulphur Dioxide(SO2)	Nitrogen Dioxide(NO2)	Carbon Monoxide(CO)
Unit			µg/m3	µg/m3	µg/m3	µg/m3	mg/m3
Limit (as Per CPCB)			24 Hrs.=100	24 Hrs.=60	24 Hrs.=80	24 Hrs.=80	1 Hrs.=04
Test Method			IS 5182 (Part-23)	ETS/STP/AIR-03	IS: 5182 (Part-2)	IS: 5182 (Part-5)	IS 5182 (Part-10)
Sl.N.	Monitoring Date	Sample ID	Test Results				
1	09.12.2022	ETS/DI-25	72.6	33.4	10.1	18.2	1.16
2	12.12.2022	ETS/DI-26	73.4	34.1	12.4	19.1	1.49
3	16.12.2022	ETS/DI-27	71.0	35.1	11.2	20.1	2.66
4	19.12.2022	ETS/DI-28	75.4	34.0	12.4	20.7	1.31
5	23.12.2022	ETS/DI-29	71.6	32.7	11.1	19.2	0.84
6	26.12.2022	ETS/DI-30	69.5	33.1	12.0	18.3	1.06
7	30.12.2022	ETS/DI-31	74.9	33.6	11.3	20.9	1.24
8	01.01.2023	ETS/DI-32	71.7	30.5	10.6	18.3	1.73
9	05.01.2023	ETS/DI-33	67.6	29.8	11.2	19.0	2.39
10	09.01.2023	ETS/DI-34	68.0	26.5	11.8	20.1	2.11
11	12.01.2023	ETS/DI-35	70.6	26.7	12.2	21.0	1.43
12	15.01.2023	ETS/DI-36	67.6	29.1	11.1	19.2	2.64
13	19.01.2023	ETS/DI-37	66.5	31.7	10.2	22.0	2.09
14	22.01.2023	ETS/DI-38	68.9	34.1	11.3	20.2	1.20
15	28.01.2023	ETS/DI-39	71.7	34.3	11.5	21.0	1.73
16	31.01.2023	ETS/DI-40	69.9	33.5	12.0	21.7	2.39
17	04.02.2023	ETS/DI-41	68.1	33.8	11.2	20.2	1.33
18	08.02.2023	ETS/DI-42	67.1	35.2	13.9	19.4	2.11
19	11.02.2023	ETS/DI-43	73.2	33.5	10.2	18.2	2.01
20	14.02.2023	ETS/DI-44	66.9	35.0	11.4	16.7	1.60
21	19.02.2023	ETS/DI-45	68.0	33.6	11.8	20.3	2.66
22	23.02.2023	ETS/DI-46	70.9	34.5	11.5	19.2	2.39
23	27.02.2023	ETS/DI-47	69.6	30.3	11.2	17.8	1.47
24	04.03.2023	ETS/DI-48	72.7	28.9	10.4	20.1	2.64
Minimum			66.5	26.5	10.1	16.7	0.84
Maximum			75.4	35.2	13.9	22.0	2.66
Average			70.3	32.4	11.4	19.6	1.82
98 PERCENTILE			75.16	35.17	13.19	21.83	2.66

****End of Test Report****

Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated in this report are for the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



Page 1 of 1

For ENVIRO-TECH SERVICES

AUTHORIZED SIGNATORY
MD HUMAIR
Quality Manager

TEST REPORT

TEST REPORT NO : ETS/4262/12/2022

DATE OF REPORT : 10.03.2023

AMBIENT AIR QUALITY MONITORING AND ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Analysis Start Date : 10.12.2022

Analysis End Date : 05.03.2023

Sampling Done By : ETS STAFF

Sampling Location : INGLIS

Sampling Method : ETS/STP/AIR-01

Sampling Machine Placed At Height : 1.5 MTR. (FROM GROUND)

Weather Condition : CLEAR

Test Parameters			Particulate Matter(PM10)	Particulate Matter(PM2.5)	Sulphur Dioxide(SO ₂)	Nitrogen Dioxide(NO ₂)	Carbon Monoxide(CO)
Unit			µg/m ³	µg/m ³	µg/m ³	µg/m ³	mg/m ³
Limit (as Per CPCB)			24 Hrs.=100	24 Hrs.=60	24 Hrs.=80	24 Hrs.=80	1 Hrs.=04
Test Method			IS 5182 (Part-23)	ETS/STP/AIR-03	IS: 5182 (Part-2)	IS: 5182 (Part-6)	IS 5182 (Part-10)
Sl. N.	Monitoring Date	Sample ID	Test Results				
1	07.12.2022	ETS/DI-97	67.6	39.1	13.1	18.6	0.33
2	10.12.2022	ETS/DI-98	69.1	41.0	13.8	21.1	0.37
3	12.12.2022	ETS/DI-99	60.7	36.0	11.0	15.3	0.34
4	15.12.2022	ETS/DI-100	59.7	34.0	12.1	16.3	0.38
5	19.12.2022	ETS/DI-101	61.7	41.2	6.9	21.2	0.32
6	22.12.2022	ETS/DI-102	65.4	40.4	8.7	20.0	0.43
7	26.12.2022	ETS/DI-103	65.8	37.4	12.8	16.6	0.51
8	30.12.2022	ETS/DI-104	68.2	41.2	12.4	20.8	0.47
9	03.01.2023	ETS/DI-105	67.1	41.0	13.8	20.5	0.40
10	06.01.2023	ETS/DI-106	69.6	40.3	11.0	19.9	0.52
11	10.01.2023	ETS/DI-107	63.5	38.1	13.4	17.5	0.55
12	13.01.2023	ETS/DI-108	62.6	38.7	8.9	17.9	0.58
13	17.01.2023	ETS/DI-109	61.6	37.8	8.2	17.1	0.39
14	20.01.2023	ETS/DI-110	62.4	41.3	9.9	20.3	0.38
15	23.01.2023	ETS/DI-111	59.9	37.4	11.0	16.6	0.46
16	27.01.2023	ETS/DI-112	62.4	39.2	12.4	17.1	0.75
17	03.02.2023	ETS/DI-113	66.6	36.8	12.4	15.3	0.68
18	07.02.2023	ETS/DI-114	70.7	37.5	13.8	19.6	0.69
19	10.02.2023	ETS/DI-115	64.6	38.3	13.4	17.8	0.57
20	13.02.2023	ETS/DI-116	63.0	40.3	13.1	19.6	0.50
21	17.02.2023	ETS/DI-117	64.1	41.9	8.9	23.9	0.94
22	20.02.2023	ETS/DI-118	69.0	40.0	9.9	22.0	0.41
23	26.02.2023	ETS/DI-119	67.6	38.8	11.5	20.3	0.51
24	03.03.2023	ETS/DI-120	69.6	39.1	13.1	17.1	0.75
Minimum			59.7	34.0	6.9	15.3	0.32
Maximum			70.7	41.9	13.8	23.9	0.94
Average			65.1	39.0	11.5	18.8	0.51
98 PERCENTILE			70.2	41.6	13.8	23.0	0.85

****End of Test Report****



ENVIRO-TECH SERVICES

An Analytical Laboratory



ISO 45001

(A GOVERNMENT APPROVED LAB)

Plot No. 1/32, S.S. of G.T. Road Industrial Area, Ghaziabad (U.P.) - 201001

email : etslab2012@gmail.com | Website : www.etslab.in | Ph.: 9911516076, 9811736063



TEST REPORT

TEST REPORT NO : ETS/904/02/2023

DATE OF REPORT : 10.03.2023

NOISE MONITORING REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT
Date of Monitoring : 18.02.2023
Monitoring Start Date : 18.02.2023
Monitoring End Date : 19.02.2023
Monitoring Done By : ETS STAFF
Monitoring Duration : 24.0 HOURS
Place Of Monitoring : PROJECT SITE
Category Of Area : RESIDENTIAL AREA
Sampling Method : ETS/LAB/NOISE-01

S. No.	Test Parameters	Unit	Result	Ambient Noise Standards/Specification (CPCB)
1.	Noise Level Day Time	Leq :dB (A)	52.6	55
2.	Noise Level Night Time	Leq :dB (A)	41.3	45

Remark: Day time is reckoned in between 02.00 A.M. and 10.00 P.M.
Night time is reckoned in between 10.00 P.M. and 02.00 A.M.

****End of Test Report****

Page 1 of 1



For Enviro-Tech Services

AUTHORIZED SIGNATORY

Pushkar Mittal
Lab In-charge

Format no ETS /LAB/TR-02 Issue No 04 dt 01/02/2019 Rev No 02 dt 01/02/2019

Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



ETS-LAB

ENVIRO-TECH SERVICES

An Analytical Laboratory



ISO 45001

(A GOVERNMENT APPROVED LAB)

Plot No. 1/32, S.S. of G.T. Road Industrial Area, Ghaziabad (U.P.) - 201001

email : etslab2012@gmail.com | Website : www.etslab.in | Ph.: 9911516076, 9811736063



TEST REPORT

TEST REPORT NO : ETS/4263/02/2023

DATE OF REPORT : 10.03.2023

NOISE MONITORING REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Date of Monitoring : 18.02.2023

Monitoring Start Date : 18.02.2023

Monitoring End Date : 19.02.2023

Monitoring Done By : ETS STAFF

Monitoring Duration : 24.0 HOURS

Place Of Monitoring : BERKAP

Category Of Area : RESIDENTIAL AREA

Sampling Method : ETS/LAB/NOISE-01

S. No.	Test Parameters	Unit	Result	Ambient Noise Standards/Specification (CPCB)
1.	Noise Level Day Time	Leq :dB (A)	48.3	55
2.	Noise Level Night Time	Leq :dB (A)	37.1	45

Remark: Day time is reckoned in between 02.00 A.M. and 10.00 P.M.
Night time is reckoned in between 10.00 P.M. and 02.00 A.M.

****End of Test Report****

Page 1 of 1



For Enviro-Tech Services

(Signature)
AUTHORIZED SIGNATORY

Note:-

Format no ETS /LAB/TR-02 Issue No 04 dt 01/02/2019 Rev No 02 dt 01/02/2019

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



ENVIRO-TECH SERVICES

An Analytical Laboratory



ISO 45001

(A GOVERNMENT APPROVED LAB)

Plot No. 1/32, S.S. of G.T. Road Industrial Area, Ghaziabad (U.P.) - 201001

email : etslab2012@gmail.com | Website : www.etslab.in | Ph.: 9911516076, 9811736063



TEST REPORT

TEST REPORT NO : ETS/4264/02/2023

DATE OF REPORT : 10.03.2023

NOISE MONITORING REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT
Date of Monitoring : 18.02.2023
Monitoring Start Date : 18.02.2023
Monitoring End Date : 19.02.2023
Monitoring Done By : ETS STAFF
Monitoring Duration : 24.0 HOURS
Place Of Monitoring : BANK
Category Of Area : RESIDENTIAL AREA
Sampling Method : ETS/LAB/NOISE-01

S. No.	Test Parameters	Unit	Result	Ambient Noise Standards/Specification (CPCB)
1.	Noise Level Day Time	Leq :dB (A)	52.6	55
2.	Noise Level Night Time	Leq :dB (A)	38.3	45

Remark: Day time is reckoned in between 02.00 A.M. and 10.00 P.M.
Night time is reckoned in between 10.00 P.M. and 02.00 A.M.

****End of Test Report****

Page 1 of 1



CHECKED BY
SHRADDHA GUPTA

Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

Format no ETS /LAB/TR-02 Issue No 04 dt 01/02/2019 Rev No 02 dt 01/02/2019

For Enviro-Tech Services

AUTHORIZED SIGNATORY
Lab In-charge



TEST REPORT

TEST REPORT NO : ETS/4265/02/2023

DATE OF REPORT : 10.03.2023

NOISE MONITORING REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT
Date of Monitoring : 20.02.2023
Monitoring Start Date : 20.02.2023
Monitoring End Date : 21.02.2023
Monitoring Done By : ETS STAFF
Monitoring Duration : 24.0 HOURS
Place Of Monitoring : DARIHAT
Category Of Area : RESIDENTIAL AREA
Sampling Method : ETS/LAB/NOISE-01

S. No.	Test Parameters	Unit	Result	Ambient Noise Standards/Specification (CPCB)
1.	Noise Level Day Time	Leq :dB (A)	50.6	55
2.	Noise Level Night Time	Leq :dB (A)	36.4	45

Remark: Day time is reckoned in between 02.00 A.M. and 10.00 P.M.
Night time is reckoned in between 10.00 P.M. and 02.00 A.M.

****End of Test Report****

Page 1 of 1



CHECKED BY
SHRADDHA GUPTA

For Enviro-Tech Services

AUTHORIZED SIGNATORY

Lab In-charge

Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



TEST REPORT

TEST REPORT NO : ETS/4266/02/2023

DATE OF REPORT : 10.03.2023

NOISE MONITORING REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT
Date of Monitoring : 20.02.2023
Monitoring Start Date : 20.02.2023
Monitoring End Date : 21.02.2023
Monitoring Done By : ETS STAFF
Monitoring Duration : 24.0 HOURS
Place Of Monitoring : BAGAH
Category Of Area : RESIDENTIAL AREA
Sampling Method : ETS/LAB/NOISE-01

S. No.	Test Parameters	Unit	Result	Ambient Noise Standards/Specification (CPCB)
1.	Noise Level Day Time	Leq :dB (A)	47.8	55
2.	Noise Level Night Time	Leq :dB (A)	39.6	45

Remark: Day time is reckoned in between 02.00 A.M. and 10.00 P.M.
Night time is reckoned in between 10.00 P.M. and 02.00 A.M.

****End of Test Report****

Page 1 of 1



Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

For Enviro-Tech Services


Pushkar Mittal
LAB In-Charge

AUTHORIZED SIGNATORY



ENVIRO-TECH SERVICES

An Analytical Laboratory



ISO 45001

(A GOVERNMENT APPROVED LAB)

Plot No. 1/32, S.S. of G.T. Road Industrial Area, Ghaziabad (U.P.) - 201001

email : etslab2012@gmail.com | Website : www.etslab.in | Ph.: 9911516076, 9811736063

TEST REPORT

TEST REPORT NO : ETS/1700/03/2023

DATE OF REPORT : 10.03.2023

NOISE MONITORING REPORT

Name And Address of Customer : AURANGABAD SONE 21 GHAT,
AREA: 87.92 HA. MAUZA/VILL- GOTHALI, P.O- GOTHALI, P.S- GOTHALI,
BLOCK- BARUN, DISTRICT- AURANGABAD, BIHAR.

Date of Monitoring : 20.02.2023

Monitoring Start Date : 20.02.2023

Monitoring End Date : 21.02.2023

Sample ID No : 1700

Monitoring Done By : ETS STAFF

Monitoring Duration : 24.0 HOURS

Place Of Monitoring : NQ-4 MIDDLE SCHOOL NEAR GOTHALLEE

Category Of Area : SILENCE ZONE

Sampling Method : ETS/LAB/NOISE-01

S. No.	Test Parameters	Unit	Result	Ambient Noise Standards/Specification (CPCB)
1.	Noise Level Day Time	Leq :dB (A)	47.2	50
2.	Noise Level Night Time	Leq :dB (A)	35.6	40

Remark: Day time is reckoned in between 02.00 A.M. and 10.00 P.M.
Night time is reckoned in between 10.00 P.M. and 02.00 A.M.

****End of Test Report****

Page 1 of 1



FOR ENVIRO-TECH SERVICES

For ENVIRO-TECH SERVICES

MD HUMRAJ
Quality Manager

AUTHORIZED SIGNATORY

Format no ETS /LAB/TR-02 Issue No 04 dt 01/02/2019 Rev No 02 dt 01/02/2019

Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



ENVIRO-TECH SERVICES

An Analytical Laboratory



ISO 45001

(A GOVERNMENT APPROVED LAB)

Plot No. 1/32, S.S. of G.T. Road Industrial Area, Ghaziabad (U.P.) - 201001

email : etslab2012@gmail.com | Website : www.etslab.in | Ph.: 9911516076, 9811736063

TEST REPORT

TEST REPORT NO : ETS/1703/03/2023

DATE OF REPORT : 10.03.2023

NOISE MONITORING REPORT

Name And Address of Customer : AURANGABAD SONE 21 GHAT,
AREA: 87.92 HA.MAUZA/VILL- GOTHALI, P.O- GOTHALI, P.S- GOTHALI,
BLOCK- BARUN, DISTRICT- AURANGABAD, BIHAR.

Date of Monitoring : 24.02.2023

Monitoring Start Date : 24.02.2023

Monitoring End Date : 25.02.2023

Sample ID No : 1703

Monitoring Done By : ETS STAFF

Monitoring Duration : 24.0 HOURS

Place Of Monitoring : NQ-7 MALIKANA

Category Of Area : RESIDENTIAL AREA

Sampling Method : ETS/LAB/NOISE-01

S. No.	Test Parameters	Unit	Result	Ambient Noise Standards/Specification (CPCB)
1.	Noise Level Day Time	Leq :dB (A)	52.8	55
2.	Noise Level Night Time	Leq :dB (A)	40.5	45

Remark: Day time is reckoned in between 02.00 A.M. and 10.00 P.M.
Night time is reckoned in between 10.00 P.M. and 02.00 A.M.

****End of Test Report****

Page 1 of 1



FOR ENVIRO-TECH SERVICES

For ENVIRO-TECH SERVICES

MD HUMRAJ
Quality Manager

AUTHORIZED SIGNATORY

Format no ETS /LAB/TR-02 Issue No 04 dt 01/02/2019 Rev No 02 dt 01/02/2019

Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



TEST REPORT

TEST REPORT NO : ETS/4267/02/2023

DATE OF REPORT : 10.03.2023

NOISE MONITORING REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT
Date of Monitoring : 22.02.2023
Monitoring Start Date : 22.02.2023
Monitoring End Date : 23.02.2023
Monitoring Done By : ETS STAFF
Monitoring Duration : 24.0 HOURS
Place Of Monitoring : INGLIS
Category Of Area : RESIDENTIAL AREA
Sampling Method : ETS/LAB/NOISE-01

S. No.	Test Parameters	Unit	Result	Ambient Noise Standards/Specification (CPCB)
1.	Noise Level Day Time	Leq :dB (A)	48.6	55
2.	Noise Level Night Time	Leq :dB (A)	33.2	45

Remark: Day time is reckoned in between 02.00 A.M. and 10.00 P.M.
Night time is reckoned in between 10.00 P.M. and 02.00 A.M.

****End of Test Report****


Page 1 of 1



Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

For Enviro-Tech Services


Ashish Mittal
Lab in-charge
AUTHORIZED SIGNATORY

Format no ETS /LAB/TR-02 Issue No 04 dt 01/02/2019 Rev No 02 dt 01/02/2019

TEST REPORT

DATE OF REPORT : 10-03-2023

TEST REPORT NO : ETS/909/02/2023

SOIL SAMPLE ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Date of Sampling : 20-02-2023

Analysis Start Date : 23-02-2023

Analysis End Date : 25-02-2023

Sample ID No : ETS/SL-909

Sampling Done By : ETS STAFF

Sampling & Testing Method : ETS/LAB/SOIL-01

Sampling Location : PROJECT SITE (SAND GHAT 12)

Sampling Quantity : 2 kg.

Packing Condition : SEALED

Packed In : ZIP POLLY BAG

S. No.	Test Parameters	Unit	Result	Test Method
1.	Texture	---	Sandy Clay Loam	IS:2720 (Pt-4)
2.	Sand	%	80.2	IS:2720 (Pt-4)
3.	Silt	%	10.8	IS:2720 (Pt-4)
4.	Clay	%	9.0	IS:2720 (Pt-4)
5.	pH (1:2 Suspension)	..	7.41	IS:2720 (Pt-26)
6.	Sodium Absorption Ratio (SAR)*	%	1.73	ETS/STP/SOIL-16
7.	Electrical Conductivity (1:2)	µmho/cm	304.6	IS:14767
8.	Water Holding Capacity(WHC)	%	32.15	IS 2720 (Part-2)
9.	Sodium (Na)	mg/kg	140.1	APHA-3125B
10.	Calcium (Ca)	mg/kg	958.5	IS 2720 (Part-23)
11.	Magnesium (Mg)	mg/kg	416.3	ETS/STP/SOIL-08
12.	Bulk Density	g/cm ³	1.90	IS 2386 (Part-4)
13.	Total Nitrogen (N)	mg/kg	238.2	APHA,Pt 4500:(N)
14.	Phosphorus (PO ₄)	mg/kg	50.4	ETS/STP/SOIL-19
15.	Potassium (K)	mg/kg	327.1	APHA-3125B
16.	Organic Matter	%	1.64	IS : 2720 (P-22)
17.	Organic Carbon	%	1.85	BS 1377 -3)
18.	Sulphate as (SO ₄)	mg/kg	2.40	IS:3025(P-24)
19.	Porosity	%	24.0	IS 13030
20.	Arsenic	mg/kg	<0.01	ETS/STP/SOIL-18
21.	Fluoride	mg/kg	0.80	ASTM 9214

****End of Test Report****



Note:-

1. Test reports without ETS-LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested sample and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

TEST REPORT

TEST REPORT NO : ETS/4268/02/2023

DATE OF REPORT : 10-03-2023

SOIL SAMPLE ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Date of Sampling : 20-02-2023

Analysis Start Date : 23-02-2023

Analysis End Date : 25-02-2023

Sample ID No : ETS/SL-4268

Sampling Done By : ETS STAFF

Sampling & Testing Method : ETS/LAB/SOIL-01

Sampling Location : BERKAP

Sampling Quantity : 2 kg

Packing Condition : SEALED

Packed In : ZIP POLLY BAG

S. No.	Test Parameters	Unit	Result	Test Method
1.	Texture	...	Sandy Clay Loam	IS:2720 (Pt-4)
2.	Sand	%	54.4	IS:2720 (Pt-4)
3.	Silt	%	30.6	IS:2720 (Pt-4)
4.	Clay	%	15.0	IS:2720 (Pt-4)
5.	pH (1:2 Suspension)	..	8.05	IS:2720 (Pt-26)
6.	Sodium Absorption Ratio (SAR)*	%	1.88	ETS/STP/SOIL-16
7.	Electrical Conductivity (1:2)	µmho/cm	389.9	IS:14767
8.	Water Holding Capacity(WHC)	%	38.5	IS 2720 (Part-2)
9.	Sodium (Na)	mg/kg	150.3	APHA-3125B
10.	Calcium (Ca)	mg/kg	1104.9	IS 2720 (Part-23)
11.	Magnesium (Mg)	mg/kg	545.6	ETS/STP/SOIL-08
12.	Bulk Density	g/cm ³	1.57	IS 2386 (Part-4)
13.	Total Nitrogen (N)	mg/kg	182.9	APHA, Pt 4500:(N)
14.	Phosphorus (PO ₄)	mg/kg	61.4	ETS/STP/SOIL-19
15.	Potassium (K)	mg/kg	361.2	APHA-3125B
16.	Organic Matter	%	1.28	IS : 2720 (P-22)
17.	Organic Carbon	%	1.50	BS 1377 -3)
18.	Sulphate as (SO ₄)	mg/kg	2.47	IS:3025(P-24)
19.	Porosity	%	21.84	IS 13030
20.	Arsenic	mg/kg	<0.01	ETS/STP/SOIL-18
21.	Fluoride	mg/kg	0.97	ASTM 9214

****End of Test Report****

Note:-

1. Test reports checked by X B HOLOGRAM are not issued by our laboratory.
2. The results of the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice amount only. ETS/LAB/TR-02, Issue No. 05, Date 01.04.2019, Amd. No. 04 Date 01.04.2019
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

For Enviro-Tech Services

AUTHORIZED SIGNATORY



TEST REPORT

TEST REPORT NO : ETS/908/02/2023

DATE OF REPORT :10-03-2023

SOIL SAMPLE ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Date of Sampling : 20-02-2023

Analysis Start Date : 23-02-2023

Analysis End Date : 25-02-2023

Sample ID No : ETS/SL-908

Sampling Done By : ETS STAFF

Sampling & Testing Method : ETS/LAB/SOIL-01

Sampling Location : DARIHAT

Sampling Quantity : 2 kg.

Packing Condition : SEALED

Packed In : ZIP POLLY BAG

S. No.	Test Parameters	Unit	Result	Test Method
1.	Texture	...	Sandy Clay Loam	IS:2720 (Pt-4)
2.	Sand	%	58.6	IS:2720 (Pt-4)
3.	Silt	%	28.1	IS:2720 (Pt-4)
4.	Clay	%	13.3	IS:2720 (Pt-4)
5.	pH (1:2 Suspension)	..	8.01	IS:2720 (Pt-26)
6.	Sodium Absorption Ratio (SAR)*	%	1.65	ETS/STP/SOIL-16
7.	Electrical Conductivity (1:2)	µmho/cm	339.1	IS:14767
8.	Water Holding Capacity(WHC)	%	37.10	IS 2720 (Part-2)
9.	Sodium (Na)	mg/kg	173.5	APHA-3125B
10.	Calcium (Ca)	mg/kg	1179.9	IS 2720 (Part-23)
11.	Magnesium (Mg)	mg/kg	486.7	ETS/STP/SOIL-08
12.	Bulk Density	g/cm ³	1.20	IS 2386 (Part-4)
13.	Total Nitrogen (N)	mg/kg	180.6	APHA,Pt 4500:(N)
14.	Phosphorus (PO ₄)	mg/kg	53.8	ETS/STP/SOIL-19
15.	Potassium (K)	mg/kg	312.2	APHA-3125B
16.	Organic Matter	%	0.94	IS : 2720 (P-22)
17.	Organic Carbon	%	1.66	BS 1377 -3)
18.	Sulphate as (SO ₄)	mg/kg	1.46	IS:3025(P-24)
19.	Porosity	%	24.21	IS 13030
20.	Arsenic	mg/kg	<0.01	ETS/STP/SOIL-18
21.	Fluoride	mg/kg	0.83	ASTM 9214

****End of Test Report****



Page 1 of 1

For Enviro-Tech Services

[Signature]

AUTHORIZED SIGNATORY

Lab In-charge

Note:-

1. Test reports without ETS-LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



TEST REPORT

TEST REPORT NO : ETS/4269/02/2023

DATE OF REPORT : 10-03-2023

SOIL SAMPLE ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT
Date of Sampling : 20-02-2023
Analysis Start Date : 23-02-2023
Analysis End Date : 25-02-2023
Sample ID No : ETS/SL-4269
Sampling Done By : ETS STAFF
Sampling & Testing Method : ETS/LAB/SOIL-01
Sampling Location : BAGAH
Sampling Quantity : 2 kg.
Packing Condition : SEALED
Packed In : ZIP POLLY BAG

S. No.	Test Parameters	Unit	Result	Test Method
1.	Texture	...	Sandy Clay Loam	IS:2720 (Pt-4)
2.	Sand	%	50.1	IS:2720 (Pt-4)
3.	Silt	%	28.7	IS:2720 (Pt-4)
4.	Clay	%	21.2	IS:2720 (Pt-4)
5.	pH (1:2 Suspension)	..	8.25	IS:2720 (Pt-26)
6.	Sodium Absorption Ratio (SAR)*	%	1.70	ETS/STP/SOIL-16
7.	Electrical Conductivity (1:2)	µmho/cm	349.3	IS:14767
8.	Water Holding Capacity(WHC)	%	38.2	IS 2720 (Part-2)
9.	Sodium (Na)	mg/kg	178.7	APHA-3125B
10.	Calcium (Ca)	mg/kg	1215.3	IS 2720 (Part-23)
11.	Magnesium (Mg)	mg/kg	501.3	ETS/STP/SOIL-08
12.	Bulk Density	g/cm ³	1.24	IS 2386 (Part-4)
13.	Total Nitrogen (N)	mg/kg	186.0	APHA,Pt 4500:(N)
14.	Phosphorus (PO ₄)	mg/kg	55.4	ETS/STP/SOIL-19
15.	Potassium (K)	mg/kg	321.6	APHA-3125B
16.	Organic Matter	%	0.97	IS : 2720 (P-22)
17.	Organic Carbon	%	1.71	BS 1377 -3)
18.	Sulphate as (SO ₄)	mg/kg	1.50	IS:3025(P-24)
19.	Porosity	%	24.94	IS 13030
20.	Arsenic	mg/kg	<0.01	ETS/STP/SOIL-18
21.	Fluoride	mg/kg	0.85	ASTM 9214

****End of Test Report****



Page 1 of 1

Note:-

1. Test reports and HOLOGRAM are not issued by our laboratory.
2. The results are only valid for the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

For Enviro-Tech Services

Pratik Mittal
In-charge

AUTHORIZED SIGNATORY

TEST REPORT

TEST REPORT NO : ETS/4270/02/2023

DATE OF REPORT : 10-03-2023

SOIL SAMPLE ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT
Date of Sampling : 20-02-2023
Analysis Start Date : 23-02-2023
Analysis End Date : 25-02-2023
Sample ID No : ETS/SL-4270
Sampling Done By : ETS STAFF
Sampling & Testing Method : ETS/LAB/SOIL-01
Sampling Location : INGLIS
Sampling Quantity : 2 kg.
Packing Condition : SEALED
Packed In : ZIP POLLY BAG

S. No.	Test Parameters	Unit	Result	Test Method
1.	Texture	...	Sandy Clay Loam	IS:2720 (Pt-4)
2.	Sand	%	57.2	IS:2720 (Pt-4)
3.	Silt	%	32.8	IS:2720 (Pt-4)
4.	Clay	%	10.0	IS:2720 (Pt-4)
5.	pH (1:2 Suspension)	...	7.66	IS:2720 (Pt-26)
6.	Sodium Absorption Ratio (SAR)*	%	1.40	ETS/STP/SOIL-16
7.	Electrical Conductivity (1:2)	µmho/cm	330.7	IS:14767
8.	Water Holding Capacity(WHC)	%	39.3	IS 2720 (Part-2)
9.	Sodium (Na)	mg/kg	142.2	APHA-3125B
10.	Calcium (Ca)	mg/kg	1242.0	IS 2720 (Part-23)
11.	Magnesium (Mg)	mg/kg	558.4	ETS/STP/SOIL-08
12.	Bulk Density	g/cm ³	1.33	IS 2386 (Part-4)
13.	Total Nitrogen (N)	mg/kg	180.9	APHA,Pt 4500:(N)
14.	Phosphorus (PO ₄)	mg/kg	42.1	ETS/STP/SOIL-19
15.	Potassium (K)	mg/kg	265.0	APHA-3125B
16.	Organic Matter	%	1.07	IS : 2720 (P-22)
17.	Organic Carbon	%	1.40	BS 1377 -3)
18.	Sulphate as (SO ₄)	mg/kg	2.14	IS:3025(P-24)
19.	Porosity	%	19.68	IS 13030
20.	Arsenic	mg/kg	<0.01	ETS/STP/SOIL-18
21.	Fluoride	mg/kg	0.45	ASTM 9214

****End of Test Report****

Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



For Enviro-Tech Services

AUTHORIZED SIGNATORY

Lab In-charge



TEST REPORT

TEST REPORT NO : ETS/910/02/2023

DATE OF REPORT :10-03-2023

WATERSAMPLE ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Date of Sampling : 10-02-2023

Analysis Start Date : 13-02-2023

Analysis End Date : 16-02-2023

Sample ID No : ETS/SL-910

Sampling Done By : ETS STAFF

Sampling Description : GROUND WATER

Sampling Location : MAKRAIN

Sampling Method : ETS/STP/WATER-01

Sampling Quantity : 2.0 +0.5 L.

Packing Condition : SEALED

Packed In : P.V.C. AND GLASS BOTTLE

S. No.	Test Parameters	Unit	Result	Drinking Water Standards / Limit (IS:10500 2012)		Test Method
				Desirable	Permissible	
1.	Colour	Hazen	<5.0	5	15	IS:3025 (Pt-4)
2.	Odour	---	Agreeable	Agreeable	Agreeable	IS:3025 (Pt-5)
3.	pH	---	7.50	6.5 - 8.5	No Relaxation	IS:3025 (Pt-11)
4.	Taste	---	Agreeable	Agreeable	Agreeable	IS:3025 (Pt-8)
5.	Turbidity	NTU	<1.0	1	5	IS:3025 (Pt-10)
6.	Total Dissolve Solid (TDS)	mg/L	477.8	500	2000	IS:3025 (Pt-16)
7.	Total Alkalinity (CaCO ₃)	mg/L	192.2	200	600	IS:3025 (Pt-23)
8.	Total Hardness (CaCO ₃)	mg/L	205.7	200	600	IS:3025 (Pt-21)
9.	Chloride (Cl)	mg/L	81.3	250	1000	IS:3025 (Pt-32)
10.	Calcium (Ca)	mg/L	47.8	75	200	IS:3025 (Pt-40)
11.	Mineral Oil	mg/L	<0.01	0.5	No Relaxation	IS:3025 (Pt-39)
12.	Sulphate (SO ₄)	mg/L	12.71	200	400	IS:3025 (Pt-24)
13.	Nitrate (NO ₃)	mg/L	2.63	45	No Relaxation	IS:3025 (Pt-34)
14.	Fluoride (F)	mg/L	0.26	1	1.5	IS:3025 (Pt-60)
15.	Iron (Fe)	mg/L	0.11	0.3	No Relaxation	IS:3025 (Pt-53)
16.	Aluminium (Al)	mg/L	<0.02	0.03	0.2	APHA-3500 (B)

Page 1 of 2

CHECKED BY
SHRADDHA GUPTA

For Enviro-Tech Services
AUTHORIZED SIGNATORY
Lab In-charge

Note:- Format No ETS/LAB/TR-02, Issue No. 05, Date 01.04.2019, Amd. No. 04 Date 01.04.2019

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



ETS-LAB

ENVIRO-TECH SERVICES

An Analytical Laboratory

ISO 45001

(A GOVERNMENT APPROVED LAB)

Plot No. 1/32, S.S. of G.T. Road Industrial Area, Ghaziabad (U.P.) - 201001

email : etslab2012@gmail.com | Website : www.etslab.in | Ph.: 9911516076, 9811736063



TEST REPORT

TEST REPORT NO : ETS/910/02/2023

DATE OF REPORT : 10-03-2023

WATERSAMPLE ANALYSIS REPORT

17.	Selenium (Se)	mg/L	<0.01	0.01	No. Relaxation	APHA-3113 (B)
18.	Cyanide (Cn)	mg/L	N.D	0.05	No. Relaxation	APHA-4500 (C)
19.	Copper(Cu)	mg/L	<0.04	0.05	1.5	APHA-3111(B)
20.	Magnesium (Mg)	mg/L	25.9	30	100	IS:3025 (Pt-45)
21.	Manganese(Mn)	mg/L	<0.1	0.1	0.3	APHA-3111(B)
22.	Zinc(Zn)	mg/L	0.27	5	15	APHA-3111 (B)
23.	Cadmium(Cd)	mg/L	<0.001	0.003	No. Relaxation	APHA-3111 (B)
24.	Lead(Pb)	mg/L	<0.01	0.01	No. Relaxation	APHA-3111 (B)
25.	Mercury(Hg)	mg/L	<0.001	0.001	No. Relaxation	APHA-3112 (B)
26.	Nickel (Ni)	mg/L	<0.01	0.02	No. Relaxation	APHA-3111 (B)
27.	Arsenic(As)	mg/L	<0.01	0.01	0.05	APHA-3500 (B)
28.	Chromium (Cr+6)	mg/L	<0.01	0.05	No. Relaxation	APHA-3500 Cr-B
29.	Phenolic Compound (C6H5OH)	mg/L	<0.001	0.001	0.002	APHA-5530
30.	Conductivity (25 °C)	mhos/cm	562.2	Not Specified	Not Specified	APHA-2510
31.	E. Coli	Coli/100ml	Absent	Shall Not Be Detectable	---	IS:1622-1981
32.	Total Coliform	MPN/100ml	Absent	Shall Not Be Detectable	---	IS:1622-1981

****End of Test Report****

Page 2 of 2



For Enviro-Tech Services

 AUTHORIZED SIGNATORY
 Lab in-charge

- Note:- Format No ETS/LAB/TR-02, Issue No. 05, Date 01.04.2019, Amd. No. 04 Date 01.04.2019
1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
 2. The results indicated only refer to the tested samples and listed applicable parameters.
 3. No complaint will be entertained if received after 7 days of issue of test report.
 4. Our liability is limited to invoice value only.
 5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
 6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



TEST REPORT

TEST REPORT NO : ETS/4253/02/2023

DATE OF REPORT : 10-03-2023

WATERSAMPLE ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT
Date of Sampling : 10-02-2023
Analysis Start Date : 13-02-2023
Analysis End Date : 16-02-2023
Sample ID No : ETS/SL-4253
Sampling Done By : ETS STAFF
Sampling Description : GROUND WATER
Sampling Location : BERKAP
Sampling Method : ETS/STP/WATER-01
Sampling Quantity : 2.0 +0.5 Lt.
Packing Condition : SEALED
Packed In : P.V.C. AND GLASS BOTTLE

S. No.	Test Parameters	Unit	Result	Drinking Water Standards / Limit (IS:10500 2012)		Test Method
				Desirable	Permissible	
1.	Colour	Hazen	<5.0	5	15	IS:3025 (Pt-4)
2.	Odour	---	Agreeable	Agreeable	Agreeable	IS:3025 (Pt-5)
3.	pH	---	7.80	6.5 - 8.5	No Relaxation	IS:3025 (Pt-11)
4.	Taste	---	Agreeable	Agreeable	Agreeable	IS:3025 (Pt-8)
5.	Turbidity	NTU	<1.0	1	5	IS:3025 (Pt-10)
6.	Total Dissolve Solid (TDS)	mg/L	526.9	500	2000	IS:3025 (Pt-16)
7.	Total Alkalinity (CaCO ₃)	mg/L	199.9	200	600	IS:3025 (Pt-23)
8.	Total Hardness (CaCO ₃)	mg/L	213.9	200	600	IS:3025 (Pt-21)
9.	Chloride (Cl)	mg/L	84.6	250	1000	IS:3025 (Pt-32)
10.	Calcium (Ca)	mg/L	74.7	75	200	IS:3025 (Pt-40)
11.	Mineral Oil	mg/L	<0.01	0.5	No Relaxation	IS:3025 (Pt-39)
12.	Sulphate (SO ₄)	mg/L	38.2	200	400	IS:3025 (Pt-24)
13.	Nitrate (NO ₃)	mg/L	1.74	45	No Relaxation	IS:3025 (Pt-34)
14.	Fluoride (F)	mg/L	0.27	1	1.5	IS:3025 (Pt-60)
15.	Iron (Fe)	mg/L	0.11	0.3	No Relaxation	IS:3025 (Pt-53)
16.	Aluminium (Al)	mg/L	<0.02	0.03	0.2	APHA-3500 (B)

CHECKED BY
SHRADDHA GUPTA

Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

For Enviro Tech Services

AUTHORIZED SIGNATORY

Lab In-charge



ETS-LAB

ENVIRO-TECH SERVICES

An Analytical Laboratory



ISO 45001

(A GOVERNMENT APPROVED LAB)

Plot No. 1/32, S.S. of G.T. Road Industrial Area, Ghaziabad (U.P.) - 201001

email : etslab2012@gmail.com | Website : www.etslab.in | Ph.: 9911516076, 9811736063



TEST REPORT

TEST REPORT NO : ETS/4253/02/2023

DATE OF REPORT : 10-03-2023

WATERSAMPLE ANALYSIS REPORT

17.	Selenium (Se)	mg/L	<0.01	0.01	No. Relaxation	APHA-3113 (B)
18.	Cyanide (Cn)	mg/L	N.D	0.05	No. Relaxation	APHA-4500 (C)
19.	Copper (Cu)	mg/L	<0.04	0.05	1.5	APHA-3111(B)
20.	Magnesium (Mg)	mg/L	26.9	30	100	IS:3025 (Pt-45)
21.	Manganese (Mn)	mg/L	<0.1	0.1	0.3	APHA-3111(B)
22.	Zinc (Zn)	mg/L	0.28	5	15	APHA-3111 (B)
23.	Cadmium (Cd)	mg/L	<0.001	0.003	No. Relaxation	APHA-3111 (B)
24.	Lead (Pb)	mg/L	<0.01	0.01	No. Relaxation	APHA-3111 (B)
25.	Mercury (Hg)	mg/L	<0.001	0.001	No. Relaxation	APHA-3112 (B)
26.	Nickel (Ni)	mg/L	<0.01	0.02	No. Relaxation	APHA-3111 (B)
27.	Arsenic (As)	mg/L	<0.01	0.01	0.05	APHA-3500 (B)
28.	Chromium (Cr+6)	mg/L	<0.01	0.05	No. Relaxation	APHA-3500 Cr-B
29.	Phenolic Compound (C6H5OH)	mg/L	<0.001	0.001	0.002	APHA-5530
30.	Conductivity (25 °C)	mhos/cm	584.7	Not Specified	Not Specified	APHA-2510
31.	E. Coli	Coli/100ml	Absent	Shall Not Be Detectable	---	IS:1622-1981
32.	Total Coliform	MPN/100ml	Absent	Shall Not Be Detectable	---	IS:1622-1981

****End of Test Report****

Page 2 of 2



Note:-

1. Test reports without ETS LAB HONOURABLE/IR-02/Issue No. 06 Date 06.04.2019, Amd. No. 04 Date 01.04.2019
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

For Enviro-Tech Services

Pustkar Mittal
Lab In-charge

AUTHORIZED SIGNATORY



TEST REPORT

TEST REPORT NO : ETS/4254/02/2023

DATE OF REPORT : 10-03-2023

WATERSAMPLE ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Date of Sampling : 10-02-2023

Analysis Start Date : 13-02-2023

Analysis End Date : 16-02-2023

Sample ID No : ETS/SL-4254

Sampling Done By : ETS STAFF

Sampling Description : GROUND WATER

Sampling Location : DARIHAT

Sampling Method : ETS/STP/WATER-01

Sampling Quantity : 2.0 +0.5 Lt.

Packing Condition : SEALED

Packed In : P.V.C. AND GLASS BOTTLE

S. No.	Test Parameters	Unit	Result	Drinking Water Standards / Limit (IS:10500 2012)		Test Method
				Desirable	Permissible	
1.	Colour	Hazen	<5.0	5	15	IS:3025 (Pt-4)
2.	Odour	---	Agreeable	Agreeable	Agreeable	IS:3025 (Pt-5)
3.	pH	---	8.17	6.5 - 8.5	No Relaxation	IS:3025 (Pt-11)
4.	Taste	---	Agreeable	Agreeable	Agreeable	IS:3025 (Pt-8)
5.	Turbidity	NTU	<1.0	1	5	IS:3025 (Pt-10)
6.	Total Dissolve Solid (TDS)	mg/L	382.4	500	2000	IS:3025 (Pt-16)
7.	Total Alkalinity (CaCO ₃)	mg/L	136.0	200	600	IS:3025 (Pt-23)
8.	Total Hardness (CaCO ₃)	mg/L	151.5	200	600	IS:3025 (Pt-21)
9.	Chloride (Cl)	mg/L	98.1	250	1000	IS:3025 (Pt-32)
10.	Calcium (Ca)	mg/L	81.2	75	200	IS:3025 (Pt-40)
11.	Mineral Oil	mg/L	<0.01	0.5	No Relaxation	IS:3025 (Pt-39)
12.	Sulphate (SO ₄)	mg/L	24.85	200	400	IS:3025 (Pt-24)
13.	Nitrate (NO ₃)	mg/L	1.74	45	No Relaxation	IS:3025 (Pt-34)
14.	Fluoride (F)	mg/L	0.07	1	1.5	IS:3025 (Pt-60)
15.	Iron (Fe)	mg/L	0.15	0.3	No Relaxation	IS:3025 (Pt-53)
16.	Aluminium (Al)	mg/L	<0.02	0.03	0.2	APHA-3500 (B)

Page 1 of 2

For Enviro Tech Services

CHECKED BY
SHRADDHA GUPTA

AUTHORIZED SIGNATORY
Lab In-charge

Note:-

1. Test reports without ETS LAB HONORARIUM LAB NO. 02, Issue No. 05, Date: 01.04.2019, Amd. No. 04 Date 01.04.2019
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



TEST REPORT

TEST REPORT NO : ETS/4254/02/2023

DATE OF REPORT : 10-03-2023

WATERSAMPLE ANALYSIS REPORT

17.	Selenium (Se)	mg/L	<0.01	0.01	No. Relaxation	APHA-3113 (B)
18.	Cyanide (Cn)	mg/L	N.D	0.05	No. Relaxation	APHA-4500 (C)
19.	Copper(Cu)	mg/L	<0.04	0.05	1.5	APHA-3111(B)
20.	Magnesium (Mg)	mg/L	19.55	30	100	IS:3025 (Pt-45)
21.	Manganese(Mn)	mg/L	<0.1	0.1	0.3	APHA-3111(B)
22.	Zinc(Zn)	mg/L	0.15	5	15	APHA-3111 (B)
23.	Cadmium(Cd)	mg/L	<0.001	0.003	No. Relaxation	APHA-3111 (B)
24.	Lead(Pb)	mg/L	<0.01	0.01	No. Relaxation	APHA-3111 (B)
25.	Mercury(Hg)	mg/L	<0.001	0.001	No. Relaxation	APHA-3112 (B)
26.	Nickel (Ni)	mg/L	<0.01	0.02	No. Relaxation	APHA-3111 (B)
27.	Arsenic(As)	mg/L	<0.01	0.01	0.05	APHA-3500 (B)
28.	Chromium (Cr+6)	mg/L	<0.01	0.05	No. Relaxation	APHA-3500 Cr-B
29.	Phenolic Compound (C6H5OH)	mg/L	<0.001	0.001	0.002	APHA-5530
30.	Conductivity (25 °C)	mhos/cm	556.2	Not Specified	Not Specified	APHA-2510
31.	E. Coli	Coli/100ml	Absent	Shall Not Be Detectable	---	IS:1622-1981
32.	Total Coliform	MPN/100ml	Absent	Shall Not Be Detectable	---	IS:1622-1981

****End of Test Report****

Page 2 of 2



CHECKED BY
SHRADDHA GUPTA

Note:-

1. Test reports without ETS IEA/101/01/SLAB/12-13 and No. 05 Date 01.04.2019, Amd. No. 04 Date 01.04.2019
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

For Enviro-Tech Services

AUTHORIZED SIGNATORY

Pushkar Mittal
Lab In-charge

TEST REPORT

TEST REPORT NO : ETS/4255/02/2023

DATE OF REPORT : 10-03-2023

WATERSAMPLE ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT

Date of Sampling : 15-02-2023

Analysis Start Date : 17-02-2023

Analysis End Date : 20-02-2023

Sample ID No : ETS/SL-4255

Sampling Done By : ETS STAFF

Sampling Description : GROUND WATER

Sampling Location : BAGAH

Sampling Method : ETS/STP/WATER-01

Sampling Quantity : 2.0 +0.5 Lt.

Packing Condition : SEALED

Packed In : P.V.C. AND GLASS BOTTLE

S. No.	Test Parameters	Unit	Result	Drinking Water Standards / Limit (IS:10500 2012)		Test Method
				Desirable	Permissible	
1.	Colour	Hazen	<5.0	5	15	IS:3025 (Pt-4)
2.	Odour	---	Agreeable	Agreeable	Agreeable	IS:3025 (Pt-5)
3.	pH	---	7.27	6.5 - 8.5	No Relaxation	IS:3025 (Pt-11)
4.	Taste	---	Agreeable	Agreeable	Agreeable	IS:3025 (Pt-8)
5.	Turbidity	NTU	<1.0	1	5	IS:3025 (Pt-10)
6.	Total Dissolve Solid (TDS)	mg/L	290.0	500	2000	IS:3025 (Pt-16)
7.	Total Alkalinity (CaCO ₃)	mg/L	124.1	200	600	IS:3025 (Pt-23)
8.	Total Hardness (CaCO ₃)	mg/L	142.4	200	600	IS:3025 (Pt-21)
9.	Chloride (Cl)	mg/L	91.2	250	1000	IS:3025 (Pt-32)
10.	Calcium (Ca)	mg/L	54.4	75	200	IS:3025 (Pt-40)
11.	Mineral Oil	mg/L	<0.01	0.5	No Relaxation	IS:3025 (Pt-39)
12.	Sulphate (SO ₄)	mg/L	29.7	200	400	IS:3025 (Pt-24)
13.	Nitrate (NO ₃)	mg/L	1.75	45	No Relaxation	IS:3025 (Pt-34)
14.	Fluoride (F)	mg/L	0.01	1	1.5	IS:3025 (Pt-60)
15.	Iron (Fe)	mg/L	0.21	0.3	No Relaxation	IS:3025 (Pt-53)
16.	Aluminium (Al)	mg/L	<0.02	0.03	0.2	APHA-3500 (B)

Page 1 of 2



CHECKED BY
SHRADDHA GUPTA

- Note:
1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
 2. The results indicated only refer to the samples received and issued on the date of issue of the report.
 3. No complaint will be entertained if received after 7 days of issue of test report.
 4. Our liability is limited to invoice value only.
 5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
 6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

For Enviro Tech Services

AUTHORIZED SIGNATORY
Lab In-charge



ETS-LAB



ENVIRO-TECH SERVICES

An Analytical Laboratory

ISO 45001

(A GOVERNMENT APPROVED LAB)

Plot No. 1/32, S.S. of G.T. Road Industrial Area, Ghaziabad (U.P.) - 201001

email : etslab2012@gmail.com | Website : www.etslab.in | Ph.: 9911516076, 9811736063

TEST REPORT

TEST REPORT NO : ETS/4255/02/2023

DATE OF REPORT : 10-03-2023

WATERSAMPLE ANALYSIS REPORT

17.	Selenium (Se)	mg/L	<0.01	0.01	No. Relaxation	APHA-3113 (B)
18.	Cyanide (Cn)	mg/L	N.D	0.05	No. Relaxation	APHA-4500 (C)
19.	Copper(Cu)	mg/L	<0.04	0.05	1.5	APHA-3111(B)
20.	Magnesium (Mg)	mg/L	22.7	30	100	IS:3025 (Pt-45)
21.	Manganese(Mn)	mg/L	<0.1	0.1	0.3	APHA-3111(B)
22.	Zinc(Zn)	mg/L	0.25	5	15	APHA-3111 (B)
23.	Cadmium(Cd)	mg/L	<0.001	0.003	No. Relaxation	APHA-3111 (B)
24.	Lead(Pb)	mg/L	<0.01	0.01	No. Relaxation	APHA-3111 (B)
25.	Mercury(Hg)	mg/L	<0.001	0.001	No. Relaxation	APHA-3112 (B)
26.	Nickel (Ni)	mg/L	<0.01	0.02	No. Relaxation	APHA-3111 (B)
27.	Arsenic(As)	mg/L	<0.01	0.01	0.05	APHA-3500 (B)
28.	Chromium (Cr+6)	mg/L	<0.01	0.05	No. Relaxation	APHA-3500 Cr-B
29.	Phenolic Compound (C6H5OH)	mg/L	<0.001	0.001	0.002	APHA-5530
30.	Conductivity (25 °C)	mhos/cm	514.5	Not Specified	Not Specified	APHA-2510
31.	E. Coli	Coli/100ml	Absent	Shall Not Be Detectable	---	IS:1622-1981
32.	Total Coliform	MPN/100ml	Absent	Shall Not Be Detectable	---	IS:1622-1981

****End of Test Report****



CHECKED BY

SHRADHA GUPTA

Page 2 of 2

For Enviro-Tech Services

AUTHORIZED SIGNATORY

Lab In-charge

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.

2. The results indicated only refer to the tested samples and listed applicable parameters. Form No. ETS/LAB/TR-02, Issue No. 05, Date 01.04.2019, Amd. No. 04 Date 01.04.2019

3. No complaint will be entertained if received after 7 days of issue of test report.

4. Our liability is limited to invoice value only.

5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.

6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



TEST REPORT

TEST REPORT NO : ETS/4256/02/2023

DATE OF REPORT : 10-03-2023

WATER SAMPLE ANALYSIS REPORT

Name And Address of Customer : RIAN ENVIRO PRIVATE LIMITED
ROHTAS CLUSTER PROJECT
Date of Sampling : 20-02-2023
Analysis Start Date : 23-02-2023
Analysis End Date : 26-02-2023
Sample ID No : ETS/SL-4256
Sampling Done By : ETS STAFF
Sampling Description : GROUND WATER
Sampling Location : INGLIS
Sampling Method : ETS/STP/WATER-01
Sampling Quantity : 2.0 +0.5 Lt.
Packing Condition : SEALED
Packed In : P.V.C. AND GLASS BOTTLE

S. No.	Test Parameters	Unit	Result	Drinking Water Standards / Limit (IS:10500 2012)		Test Method
				Desirable	Permissible	
1.	Colour	Hazen	<5.0	5	15	IS:3025 (Pt-4)
2.	Odour	---	Agreeable	Agreeable	Agreeable	IS:3025 (Pt-5)
3.	pH	---	7.96	6.5 - 8.5	No Relaxation	IS:3025 (Pt-11)
4.	Taste	---	Agreeable	Agreeable	Agreeable	IS:3025 (Pt-8)
5.	Turbidity	NTU	<1.0	1	5	IS:3025 (Pt-10)
6.	Total Dissolve Solid (TDS)	mg/L	410.1	500	2000	IS:3025 (Pt-16)
7.	Total Alkalinity (CaCO ₃)	mg/L	102.3	200	600	IS:3025 (Pt-23)
8.	Total Hardness (CaCO ₃)	mg/L	134.0	200	600	IS:3025 (Pt-21)
9.	Chloride (Cl)	mg/L	88.4	250	1000	IS:3025 (Pt-32)
10.	Calcium (Ca)	mg/L	51.0	75	200	IS:3025 (Pt-40)
11.	Mineral Oil	mg/L	<0.01	0.5	No Relaxation	IS:3025 (Pt-39)
12.	Sulphate (SO ₄)	mg/L	30.02	200	400	IS:3025 (Pt-24)
13.	Nitrate (NO ₃)	mg/L	4.46	45	No Relaxation	IS:3025 (Pt-34)
14.	Fluoride (F)	mg/L	0.40	1	1.5	IS:3025 (Pt-60)
15.	Iron (Fe)	mg/L	0.20	0.3	No Relaxation	IS:3025 (Pt-53)
16.	Aluminium (Al)	mg/L	<0.02	0.03	0.2	APHA-3500 (B)

Page 1 of 2

For Enviro-Tech Services

CHECKED BY
SHRADDHA GUPTA

AUTHORIZED SIGNATORY

Note:-

1. Test reports without ETS LAB HOLOGRAM are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.



TEST REPORT

TEST REPORT NO : ETS/4256/02/2023

DATE OF REPORT : 10-03-2023

WATER SAMPLE ANALYSIS REPORT

17.	Selenium (Se)	mg/L	<0.01	0.01	No. Relaxation	APHA-3113 (B)
18.	Cyanide (Cn)	mg/L	N.D	0.05	No. Relaxation	APHA-4500 (C)
19.	Copper(Cu)	mg/L	<0.04	0.05	1.5	APHA-3111(B)
20.	Magnesium (Mg)	mg/L	25.7	30	100	IS:3025 (Pt-45)
21.	Manganese(Mn)	mg/L	<0.1	0.1	0.3	APHA-3111(B)
22.	Zinc(Zn)	mg/L	0.40	5	15	APHA-3111 (B)
23.	Cadmium(Cd)	mg/L	<0.001	0.003	No. Relaxation	APHA-3111 (B)
24.	Lead(Pb)	mg/L	<0.01	0.01	No. Relaxation	APHA-3111 (B)
25.	Mercury(Hg)	mg/L	<0.001	0.001	No. Relaxation	APHA-3112 (B)
26.	Nickel (Ni)	mg/L	<0.01	0.02	No. Relaxation	APHA-3111 (B)
27.	Arsenic(As)	mg/L	<0.01	0.01	0.05	APHA-3500 (B)
28.	Chromium (Cr+6)	mg/L	<0.01	0.05	No. Relaxation	APHA-3500 Cr-B
29.	Phenolic Compound (C6H5OH)	mg/L	<0.001	0.001	0.002	APHA-5530
30.	Conductivity (25 °C)	mhos/cm	602.2	Not Specified	Not Specified	APHA-2510
31.	E. Coli	Coli/100ml	Absent	Shall Not Be Detectable	---	IS:1622-1981
32.	Total Coliform	MPN/100ml	Absent	Shall Not Be Detectable	---	IS:1622-1981

****End of Test Report****



CHECKED BY
SHRADDHA GUPTA

Note:-

1. Test reports without ETS Lab Logo or ETS Logo are not issued. Issued On: 01.04.2019, Amd. No. 04 Date 01.04.2019
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

For Enviro-Tech Services

AUTHORIZED SIGNATORY

TEST REPORT

TEST REPORT NO : ETS/1710/03/2023

DATE OF REPORT : 10.03.2023

WATER SAMPLE ANALYSIS REPORT

Name And Address of Customer : AURANGABAD SONE 21 GHAT,
AREA: 87.92 HA. MAUZA/VILL-GOTHAULI, P.O- GOTHAULI, P.S-
GOTHAULI, BLOCK- BARUN, DISTRICT-AURANGABAD, BIHAR.

Date of Sampling : 14.02.2023
Analysis Start Date : 16.02.2023
Analysis End Date : 19.02.2023
Sampling Done By : ETS STAFF
Sample ID No : 1710
Sampling Description : SURFACE WATER
Sampling Location : SW-2 SONE RIVER (DOWNSTREAM)
Sampling Method : ETS/STP/WATER-01
Sampling Quantity : 2.0 ± 0.5 Lt.
Packing Condition : SEALED
Packed In : P.V.C. AND GLASS BOTTLE

S. No.	Test Parameters	Unit	Result	Test Method
1.	Colour	Hazen	<5.0	IS:3025 (Pt-4)
2.	Odour	---	Agreeable	IS:3025 (Pt-5)
3.	pH	---	8.1	IS:3025 (Pt-11)
4.	Temperature	°C	28.4	IS:3025 (Pt-9)
5.	Total Suspended Solids (TSS)	mg/L	8	APHA 2540-D
6.	Oil & Greases	mg/L	3	APHA 5520-D
7.	Total Residual Chlorine	mg/L	<0.05	IS 3025 Part 26
8.	Ammonical Nitrogen (as N)	mg/L	<1.0	IS:3025 (Pt-34)
9.	Free Ammonia (as NH ₃)	mg/L	<0.1	IS:3025 (Pt-26)
10.	Biological Oxygen Demand (BOD at 27°C for 3 day)	mg/L	5	APHA-4500 (D)
11.	Chemical Oxygen Demand (COD)	mg/L	20	APHA-5220 (B)
12.	Hexavalent Chromium (as Cr+6)	mg/L	<0.03	APHA-3500 Cr-B
13.	Fluoride (F)	mg/L	0.73	IS:3025 (Pt-60)
14.	Nitrate (NO ₃)	mg/L	1.7	IS:3025 (Pt-34)
15.	Dissolve Phosphate (as P)	mg/L	0.65	IS 3025 (Pt-31)
16.	Phenolic Compounds (as C ₆ H ₅ OH)	mg/L	<0.01	APHA-5530
17.	Sulphide (as H ₂ S)	mg/L	<0.02	IS 3025 Part 29
18.	Cyanide (Cn)	mg/L	<0.02	APHA-4500 (C)
19.	Copper (Cu)	mg/L	<0.02	APHA-3111(B)
20.	Iron (Fe)	mg/L	0.35	IS:3025 (Pt-53)
21.	Manganese (Mn)	mg/L	<0.05	APHA-3111(B)
22.	Selenium (Se)	mg/L	<0.01	APHA-3113 (B)
23.	Zinc (Zn)	mg/L	<0.05	APHA-3111 (B)
24.	Cadmium (Cd)	mg/L	<0.001	APHA-3111 (B)
25.	Lead (Pb)	mg/L	<0.005	APHA-3111 (B)
26.	Mercury (Hg)	mg/L	<0.001	APHA-3112 (B)
27.	Nickel (Ni)	mg/L	<0.01	APHA-3111 (B)
28.	Arsenic (As)	mg/L	<0.01	APHA-3500 (B)
29.	Total Chromium (as Cr)	mg/L	<0.03	APHA-3120 Cr-B
30.	Vanadium (as V)	mg/L	<0.1	APHA-3120B

****End of Test Report****

Note:-

- Test reports are not issued by our laboratory.
- The results indicated only refer to the tested samples and listed applicable parameters.
- No complaint will be entertained if received after 7 days of issue of test report.
- Our liability is limited to invoice value only.
- The sample shall be destroyed after 15 days & Biological / Perishable sample shall be destroyed immediately after issue of test report.
- This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

Page 1 of 1



ENVIRO-TECH SERVICES

MD HUMAIR
Quality Manager
AUTHORIZED SIGNATORY

TEST REPORT

TEST REPORT NO : ETS/1711/02/2023

DATE OF REPORT : 10.03.2023

WATER SAMPLE ANALYSIS REPORT

Name And Address of Customer : AURANGABAD SONE 21 GHAT,
AREA: 87.92 HA. MAUZA/VILL-GOTHAULI, P.O- GOTHAULI, P.S-
GOTHAULI, BLOCK- BARUN, DISTRICT-AURANGABAD, BIHAR.

Date of Sampling : 15.02.2023
Analysis Start Date : 17.02.2023
Analysis End Date : 20.02.2023
Sample ID No : 1711
Sampling Done By : ETS STAFF
Sampling Description : SURFACE WATER
Sampling Location : SW-3 POND NEAR GOTHAULEE
Sampling Method : ETS/STP/WATER-01
Sampling Quantity : 2.0 +0.5 Lt.
Packing Condition : SEALED
Packed In : P.V.C. AND GLASS BOTTLE

S. No.	Test Parameters	Unit	Result	Test Method
1.	Colour	Hazen	<5.0	IS:3025 (Pt-4)
2.	Odour	---	Agreeable	IS:3025 (Pt-5)
3.	pH	---	7.2	IS:3025 (Pt-11)
4.	Temperature	°C	23.4	IS:3025 (Pt-9)
5.	Total Suspended Solids (TSS)	mg/L	17	APHA 2540-D
6.	Oil & Greases	mg/L	5	APHA 5520-D
7.	Total Residual Chlorine	mg/L	<0.05	IS 3025 Part 26
8.	Ammonical Nitrogen (as N)	mg/L	<1.0	IS:3025 (Pt-34)
9.	Free Ammonia (as NH ₃)	mg/L	<0.1	IS:3025 (Pt-26)
10.	Biological Oxygen Demand (BOD at 27°C for 3 day)	mg/L	8	APHA-4500 (D)
11.	Chemical Oxygen Demand (COD)	mg/L	25	APHA-5220 (B)
12.	Hexavalent Chromium (as Cr+6)	mg/L	<0.03	APHA-3500 Cr-B
13.	Fluoride (F)	mg/L	0.54	IS:3025 (Pt-60)
14.	Nitrate (NO ₃)	mg/L	1.5	IS:3025 (Pt-34)
15.	Dissolve Phosphate (as P)	mg/L	0.36	IS 3025 (Pt-31)
16.	Phenolic Compounds (as C ₆ H ₅ OH)	mg/L	<0.01	APHA-5530
17.	Sulphide (as H ₂ S)	mg/L	<0.02	IS 3025 Part 29
18.	Cyanide (Cn)	mg/L	<0.02	APHA-4500 (C)
19.	Copper (Cu)	mg/L	<0.02	APHA-3111(B)
20.	Iron (Fe)	mg/L	0.25	IS:3025 (Pt-53)
21.	Manganese (Mn)	mg/L	<0.05	APHA-3111(B)
22.	Selenium (Se)	mg/L	<0.01	APHA-3113 (B)
23.	Zinc (Zn)	mg/L	<0.05	APHA-3111 (B)
24.	Cadmium (Cd)	mg/L	<0.001	APHA-3111 (B)
25.	Lead (Pb)	mg/L	<0.005	APHA-3111 (B)
26.	Mercury (Hg)	mg/L	<0.001	APHA-3112 (B)
27.	Nickel (Ni)	mg/L	<0.01	APHA-3111 (B)
28.	Arsenic (As)	mg/L	<0.01	APHA-3500 (B)
29.	Total Chromium (as Cr)	mg/L	<0.03	APHA-3120 Cr-B
30.	Vanadium (as V)	mg/L	<0.1	APHA-3120B

****End of Test Report****



Note:-

1. Test reports issued by ENVIRO-TECH SERVICES are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to invoice value only.
5. The sample shall be destroyed after 15 days & biological/perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

Page 1 of 1

For ENVIRO-TECH SERVICES

MR. HUMRAH
Quality Manager

AUTHORIZED SIGNATORY

TEST REPORT

TEST REPORT NO : ETS/1712/05/2023

DATE OF REPORT : 10.03.2023

WATER SAMPLE ANALYSIS REPORT

Name And Address of Customer : AURANGABAD SONE 21 GHAT,
AREA: 87.92 HA. MAUZA/VILL-GOTHAULI, P.O- GOTHAULI, P.S-
GOTHAULI, BLOCK- BARUN, DISTRICT-AURANGABAD, BIHAR.

Date of Sampling : 20.02.2023
Analysis Start Date : 22.02.2023
Analysis End Date : 25.02.2023
Sample ID No : 1712
Sampling Done By : ETS STAFF
Sampling Description : SURFACE WATER
Sampling Location : SW-4 POND NEAR CHURAPARSURAMPUR
Sampling Method : ETS/STP/WATER-01
Sampling Quantity : 2.0 +0.5 Lt.
Packing Condition : SEALED
Packed In : P.V.C. AND GLASS BOTTLE

S. No.	Test Parameters	Unit	Result	Test Method
1.	Colour	Hazen	<5.0	IS:3025 (Pt-4)
2.	Odour	---	Agreeable	IS:3025 (Pt-5)
3.	pH	---	8.5	IS:3025 (Pt-11)
4.	Temperature	°C	27.9	IS:3025 (Pt-9)
5.	Total Suspended Solids, (TSS)	mg/L	11	APHA 2540-D
6.	Oil & Greases	mg/L	6	APHA 5520-D
7.	Total Residual Chlorine	mg/L	<0.05	IS 3025 Part 26
8.	Ammonical Nitrogen (as N)	mg/L	<1.0	IS:3025 (Pt-34)
9.	Free Ammonia (as NH ₃)	mg/L	<0.1	IS:3025 (Pt-26)
10.	Biological Oxygen Demand (BOD at 27°C for 3 day)	mg/L	9	APHA-4500 (D)
11.	Chemical Oxygen Demand (COD)	mg/L	29	APHA-5220 (B)
12.	Hexavalent Chromium (as Cr+6)	mg/L	<0.03	APHA-3500 Cr-B
13.	Fluoride (F)	mg/L	0.39	IS:3025 (Pt-60)
14.	Nitrate (NO ₃)	mg/L	1.8	IS:3025 (Pt-34)
15.	Dissolve Phosphate (as P)	mg/L	0.45	IS 3025 (Pt-31)
16.	Phenolic Compounds (as C ₆ H ₅ OH)	mg/L	<0.01	APHA-5530
17.	Sulphide (as H ₂ S)	mg/L	<0.02	IS 3025 Part 29
18.	Cyanide (Cn)	mg/L	<0.02	APHA-4500 (C)
19.	Copper (Cu)	mg/L	<0.02	APHA-3111(B)
20.	Iron (Fe)	mg/L	0.21	IS:3025 (Pt-53)
21.	Manganese (Mn)	mg/L	<0.05	APHA-3111(B)
22.	Selenium (Se)	mg/L	<0.01	APHA-3113 (B)
23.	Zinc (Zn)	mg/L	<0.05	APHA-3111 (B)
24.	Cadmium (Cd)	mg/L	<0.001	APHA-3111 (B)
25.	Lead (Pb)	mg/L	<0.005	APHA-3111 (B)
26.	Mercury (Hg)	mg/L	<0.001	APHA-3112 (B)
27.	Nickel (Ni)	mg/L	<0.01	APHA-3111 (B)
28.	Arsenic (As)	mg/L	<0.01	APHA-3500 (B)
29.	Total Chromium (as Cr)	mg/L	<0.03	APHA-3120 Cr-B
30.	Vanadium (as V)	mg/L	<0.1	APHA-3120B

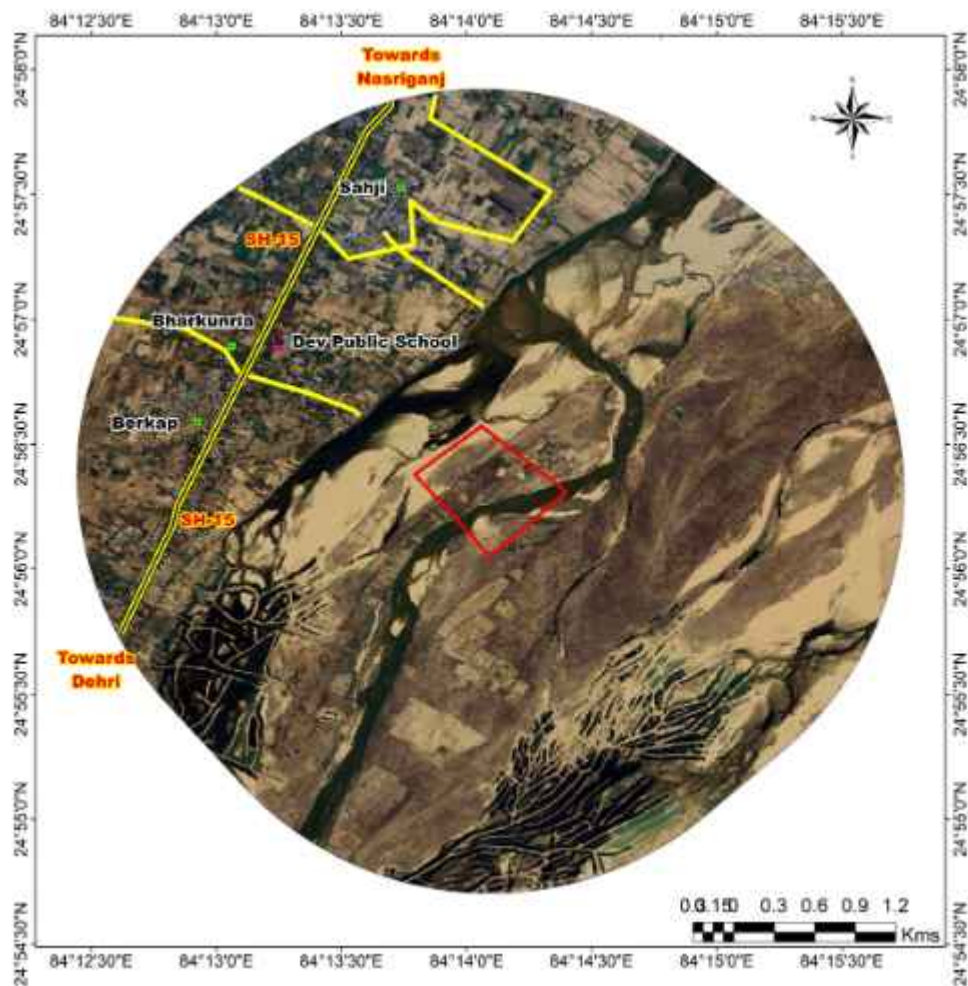
****End of Test Report****



Note:-

1. Test reports and certificates are not issued by our laboratory.
2. The results indicated only refer to the tested samples and listed applicable parameters.
3. No complaint will be entertained if received after 7 days of issue of test report.
4. Our liability is limited to the value of the sample only.
5. The sample shall be destroyed after 15 days of Biological / Perishable sample shall be destroyed immediately after issue of test report.
6. This test report shall not be used in any advertising media or as evidence in the court of Law without prior written permission of the laboratory.

Annexure –VIII
(2.5 Km Utility Map)



Legend

-  School
-  Settlement
-  SH-15
-  Metalled Road

Rohtas Sone - 11A
Mauza-Berkap, Block- Dehri,
District- Rohtas, Bihar

Location Map

Annexure –IX
(Questionnaire)

PROFORMA FOR ENVIRONMENTAL APPRAISAL OF MINING PROJECTS (MINING SECTOR PROJECTS)

- Note 1: All information to be given in the form of Annex/s should be properly numbered and form part of reply to this Performa.
- Note 2: Please enter ✓ in appropriate box where answer is Yes / No
- Note 3: No abbreviation to be used - **Not available** or **Not applicable** should be clearly mentioned.
- Note 4: **Core zone** is the mining lease area.
Buffer zone in case of ML area up to 25 ha is to be considered as **5 km** all around the periphery of the core zone and for ML area above 25 ha an area **10 km** all around the periphery of the core zone.
- Note 5: Adopt **Scoping process** in carrying out EIA study.

1. General Information

1.	General information	
a	Name of the project	Rohtas Sone- 11A
I	Name of the proponent	Innocent Traders Limited Director: Karan Kumar Bhutoria
ii	Mailing Address	Innocent Traders Limited Director: Karan Kumar Bhutoria S/o- Hanuman Mal Bhutoria Add- 16 Strand Road, Diamond Heritage, 7th Floor, Room No.-701-D, Kolkata, 700001
	E-mail	innocentradersltd@gmail.com
	Telephone	9830637008
	Fax No.	--
b	Objective of the project	Sand Mining
c	Location of mine	
	Village	Mauza- Berkap,
	Tehsil	Block- Dehri
	District	Rohtas
	State	Bihar

d	Does the proposal relate to	Yes	No
i	New mine	√	-
ii	Expansion	-	√
iii	Increase in ML area	-	√
iv	Increase in annual production	-	√
v	Renewal of ML	-	√
vi	Modernization	-	√
e	Site Information		
i	Geographical Location		
	Latitude	24° 56' 3.15" N to 24° 56' 34.29" N	
	Longitude	84° 14' 3.47 " E to 84° 14' 23.88" E	
	Survey of India Topo sheet number	G45S1, G45S5, G45M4, G45M8	
	Elevation above Mean Sea Level	120.6 m to 120.2 m	
	Total mining lease area (in ha.)	48.0 Ha.	
ii	Dominant nature of terrain	Yes	No
	Flat	√	-
	Undulated	-	√
	Hilly	-	√
2.	Land usage of the mining lease area (in ha.)		
a	Agricultural	-	
b	Forest (Jungle-jhari)	-	
c	Waste land (G.M. Land)	-	
d	Grazing	--	
e	Surface water bodies	48.0 Ha.	
f	Others (Private Land)	--	
g	Others (Own Land)	--	
	Total	48.0 Ha.	
3.	Indicate the seismic zone in which ML area falls. In case of zone IV & V, details of earth quakes in last 10 years.	Seismic Zone- III	
a	Severity (Richter Scale)		
b	Impact i.e. Damage to	Yes	No
	Life	-	√
	Property	-	√
	Existing mine	-	√

4. Break-up of mining lease area (in ha.) as per approved conceptual plan:

Purpose		Mining Lease Area				Total	Area acquired				Area to be acquired			
		Government		Private			Government		Private		Government		Private	
		Forest	Others	Agri .	Other s		Fores t	Others	Agri	Others	For est	Other	Agri .	Others
1. Area to be excavated		-	48.0 Ha.	-	--	48.0 Ha.	-	48.0 Ha.	-	--	-	-	-	-
2. Storage for top soil		-		-	-	-	-		-	-	-	-	-	-
3. Overburden / Dumps		-		-	--	--	-		-	--	-	-	-	-
4. Mineral storage		-		-	-	-	-		-	-	-	-	-	-
5. Infrastructure (Workshop, Administrative Building)		-		-	--	--	-		-	--	-	-	-	-
6. Roads		-		-	--	--	-		-	--	-	-	-	-
7. Railways		-		-			-		-		-	-	-	-
8. Green Belt		-		-	--	--	-		-	--	-	-	-	-
9.Parapet wall		-	-	-	--	--	-	-	-	--	-	-	-	-
10.Garland Drain		-	-	-	--	--	-	-	-	--	-	-	-	-
11.Coal handling plant / mineral separation plant		-	-	-	--	--	-	-	-	--	-	-	-	-
12. Township area		-	-	--	-	-	-	-	-	-	-	-	-	-
13. Area under Canal			-					-			-			
14. Undisturbed											-			
13.Oth er	Water reservoir	-	--	-	--	--	--	--		--	--	-	-	-
	Rehab. & Rehabilitation by plantation	-	--		--	--	--	--		-	--	-	-	-
	Undisturbed	-	--		--	--		--		--	--	-	-	-
TOTAL		-	48.0 Ha.	-	-	48.0 Ha.	--	48.0 Ha.	-	-	--		-	-

5	Township (outside mining lease)		Not Applicable		
a	Total area (in ha)		-		
b	No. of dwelling units		-		
c	Distance from mine site		-		
6	Distance of water bodies (in km)				
	Distance from	River Bank *	Other Water bodies * Sea / creek / lake / nalla etc. (specify)		
	Mining lease boundary	The mine site lies on the dry bed of Sone river.	-		
	Ancillary facilities	-	-		
[* From highest flood line / high tide line]					
7	For projects falling within the Coastal Regulation Zone (CRZ)				
	Whether the mineral to be mined is of rare nature and not available outside CRZ?	Yes	-	No	√
if yes, annex a scaled location map showing low tide line (LTL), high tide line (HTL) duly demarcated by one of the authorized agencies* [*Director, Space Application Centre, Ahmedabad; Centre for Earth Sciences Studies, Thiruvananthapuram; Institute of Remote Sensing, Anna University, Chennai; Institute of Wetland Management & Ecological Designs, Kolkata; Naval Hydrographers' Office, Dehradun; National Institute of Oceanography, Panjim, Goa; and National Institute of Ocean Technology, Chennai], boundary of mining lease area, distance of ML area from LTL and HTL CRZ boundary and CRZ classification of the project area as per the approved Coastal Zone Management Plan, and settlements, sand dunes, mangroves, forest land/patches, turtles breeding and nesting sites etc., if any, in the project area.					
8	Indicate aerial distance from the periphery of core zone / area from the periphery of the buffer zone to the boundary of following (up to 10 km):				
S. No.	Area	Name	Aerial distance from (in km.)		
			Core Zone	Buffer Zone	
1.	National Park / Sanctuary	Nil	-	-	
2.	Biosphere Reserve / Tiger Reserve / Elephant Reserve / any other Reserve	Nil	-	-	
3.	Forest (RF / PF / unclassified)	Nil	-	-	
4.	Habitat for migratory birds	Nil	-	-	
5.	Corridor for	Nil	-	-	

	animals of schedule I & II of the Wildlife (Protection) Act, 1972			
6.	Archaeological sites * Notified * Others	Nil	-	-
7.	Defense Installation	Nil	-	-
8.	Industries / Thermal Power Plants	Nil	-	-
9.	Other Mines	Yes,	-	This is the cluster mine lease. Total cluster area of mine is 538.21 Ha. (As per Approved LOD).
10.	Airport	Nil	-	-
11.	Railway Lines	Sone Nagar Railway Station	-	Approx. 5.7 Km towards SSE
12.	National / State Highways	SH-15	-	Approx. 1.4 Km towards West
[* Buffer zone in case of ML area up to 25 ha. is to be considered as 5 km all around the periphery of the core zone and for ML area above 25 ha. an area 10 km all around the periphery of the core zone].				

9. Description of flora & fauna separately in the core and buffer zones. *

[* Consult the Wildlife (Protection) Act, 1972 as amended subsequently and list species with (1) Common name (2) Scientific name and (3) under which schedule of the Wildlife (Protection) Act the identified species fall. Get the list authenticated by an Expert in the field / credible scientific institute / University / Chief Wildlife Warden Office. **Information to be based on field survey.**]

Details are given in Chapter 3 of the EIA report.

10	Details of mineral reserves (as per approved Mining Plan)	Quantity (In tons)	
a	Proved		
b	Indicated	--	
c	Inferred	--	
d	Mineable reserves	15,55,200 TPA	
11	Major geological formation / disturbances in the mining lease area	Yes	No
a	Geological maps submitted	√	-
b	Geological sections submitted	√	-
c	Contour map submitted	√	-

d	Whether the presence, if any, noted of		
I	Faults	-	√
Ii	Dykes	-	√
Iii	Shear Zone	-	√
Iv	Folds	-	√
V	Other weak zones	-	√
e	Source of data (Indicate)	-	
12	Production of mineral(s) and life of mine		
a	Rated capacity of mine mineral wise (Tonnes / annum)	15,55,200 TPA	
b	Life of mine at proposed capacity (Years)	It is a river bed deposit and mined out area shall be replenished each year	
c	Lease period (Years)	LOI issued letter no- 26/Khanan,Sasaram, dated 04-01-2024 for the period of Five Years	
d	Date of expiry of lease (D /M /Y)	-	
e	Indicate in case of existing mines	-	
i	Date of opening of mine	-	
ii	Production in the last 5 Years	-	
iii	Projected production for the next 6 th to 10 th year	-	
iv	Whether mining was suspended after opening of the mine?	-	
v	If yes, details there of including last production figure and reason for the same.	--	
f	Whether plans & sections provided?	Yes	
13	Type and method of mining operations		
TYPE		METHOD	
Opencast	√	Manual	-
Underground	-	Mechanized	-
Both	-	Semi-mechanized	√
14	Details of ancillary operations for mineral processing		
a	Existing	-	
b	Additional	-	
15	Mine details		
a	Opencast mine		
i	Stripping ratio (mineral in tonnes to over burden in m ³)	-	
ii	Ultimate working depth (in m bgl)	3 m	
iii	Indicate present working depth in case of existing mine (in m bgl)	--	
iv	Thickness of top soil (in m.)	--	
a	Minimum	0.0	
b	Maximum	0	
c	Average	0	

v	Thickness of overburden (in m.)	
a	Minimum	0.0
b	Maximum	0
c	Average	--
vi	Mining Plan	
a	Height and width of the bench in overburden / waste.	0
b	Height & width of the bench in ore body / coal seam.	Height: 1 m Width : 1.5 m
c	Proposed inclination / slope of the sides of the opencast mine (separately for overburden, coal / ore and overall slope of the pit sides) both while operating the mine as well as at the time of closure of the mine.	45°
d	Whether transverse sections across the opencast mine at the end of fifth year and at the end of the life of the mine have been submitted?	--
vii	Type of blasting, if any, to be adopted	--
b	Underground mine-	<u>Not Applicable</u>
i	Seam / Ore body	
	Min Depth (m)	-
	Max. Depth (m)	-
	Avg. thickness (m)	-
	Rate of dip	-
	Direction of dip in degree	-
ii	Mode of entry into the mine	
	Shaft	-
	Adit	-
	Incline	-
iii	Details of machinery	
	On surface	-
	At Face	-
	For transportation	-
	Others	-
iv	Method of stopping	
	Open	-
	Filled	-
	Shrinkage	-
	Caving	-
	Combination of above	-
	Others (Specify)	-
v	Extraction method	
	Caving	-
	Stowing	-
	Partial extraction	-
vi	Subsidence	

	Predicted max. subsidence (in m)	-	
	Max. value of tensile strain (in mm/m)	-	
	Max. slope change (in mm/m)	-	
	Whether identified possible subsidence area(s) superimposed on Surface Plan has been submitted?	-	
	Major impacts on surface features like natural drainage pattern, houses, buildings, water bodies, roads, forest, etc.	-	
	Salient features of subsidence management (monitoring and control).	-	
16	Surface drainage pattern at mine site	Yes	No
a	Whether the pre-mining surface drainage plan submitted?		√
b	Do you propose any modification / diversion in the existing natural drainage pattern at any stage? If yes, when. Provide location map indicating contours, dimensions of water body to be diverted, direction of flow of water and proposed route / changes, if any i.e. realignment of river / nallah / any other water body falling within core zone and its impact	-	√
17	Embankment and / or weir construction		
a	Do you propose, at any stage, construction of		
i	Embankment for protection against flood?	No	
ii	Weir for water storage for the mine?	No	
b	If so, provide details thereof.	-	
c	Impact of embankment on HFL and settlement around.	-	
d	Impact of weir on downstream users of water	-	
18	Vehicular traffic density (outside the ML area)		
		Type of vehicles	No. of vehicles per day (in PCU)
a	Existing	tractor/trolley	5070
b	After the proposed activity		6690
c	Whether the existing road network is adequate?	Yes	
	If no, provide details of alternative proposal?	-	
19	Loading, transportation and unloading of mineral and waste rocks on surface	Yes	No
a	Manual	√	
b	Tubs, mine cars, etc.	-	√
c	Scraper, shovels, dumpers / trucks	√	-
d	Conveyors (belt, chain, etc.)	-	√
e	Others (specify)	-	√
20	Mineral(s) transportation outside the ML area		
		Qty. (in tonne)	Percentage (%)
a	Road	15,55,200 TPA	100
			Length (in km)
			1.4

b	Rail	-	-	-
c	Conveyors	-	-	-
d	Rope way	-	-	-
e	Water ways	-	-	-
f	Pipeline	-	-	-
g	Others (Specify)	-	-	-
Total		15,55,200 TPA	100	1.4

21. Baseline Meteorological and Air Quality data

(a) Micro-meteorological data

[Continuous monitoring through autographic instrument for one full season other than monsoon]

- (i) Wind rose pattern for one full season (16 points of compass i.e. N, NNE, NE, ---) based on 24-hourly data. For coastal area also furnish day-time and night time data. (Given in Chapter 3 of EIA report)
 - Day time
 - Night time
 - 24 – hours period
- (ii) Site specific monitored data (IMD)

Particulars	Unit	Min	Max	Avrg
Temp	C	4.5	35.4	23.5
RH	%	31	68	43
Wind Speed	m/s	0.5	8.8	2.75
Solar Radiation	W/m ²	5100	5500	5350
Wind Direction	North West			
Rainfall	12 mm			
No of Rainy Days	05			
Avrg Annual Rainfall	1144.2 mm			

* 24-hours rainfall should be reported from 08:30 hrs. IST of previous day to 08:30 hrs. IST of the day.

* Rainy day is considered when 24 hrs. rainfall is ≥ 2.5 mm.

** Visual observations of cloud cover should be recorded four times a day at regular intervals.

(iii) Indicate name and distance of the nearest IMD meteorological station from which climatological data have been obtained for reporting in the EIA report, if any.

(b) Ambient air quality data* (RPM, SPM, SO₂, and NO_x)

[*Monitoring should be carried out covering one full season except monsoon – same season as in 21 (a) (i)]

[*Frequency of sampling: Sampling to be done twice a week for the entire season 24 hourly for SPM & RPM. For gaseous pollutants 24-hourly data be given irrespective of the sampling period.]

(i) Season and period for which monitoring has been carried out in Winter Season (7th December, 2022 to 5th March, 2023)

(ii) No. of samples collected at each monitoring station: 08

Name of monitoring equipment used			PM _{2.5} (µg/m ³)			PM ₁₀ (µg/m ³)			SO ₂ (µg/m ³)			No _x (µg/m ³)			Pb**		
			Envirotech FPS – APM 5.50			RDS 460 BL			APM 411 attachment with RDS 460 BL			APM 411 attachment with RDS 460 BL			-		
Equipment sensitivity			< 0.5 µg/m ³ from 0.000 mg to 0.100 mg/ m ³			< 0.5 µg/m ³ from 0.000 mg to 0.100 mg/ m ³			< 0.5 µg/m ³ from 0.000 mg to 0.100 mg/ m ³			< 0.5 µg/m ³ from 0.000 mg to 0.100 mg/ m ³			-		
Permissible AAQ standard (CPCB) R,I,S			60 µg/m ³			100 µg/m ³			80 µg/m ³			80 µg/m ³			-		
			60 µg/m ³			100 µg/m ³			80 µg/m ³			80 µg/m ³			-		
			60 µg/m ³			100 µg/m ³			80 µg/m ³			80 µg/m ³			-		
Monitoring Location	No. of Samples Drawn	Category* (R, I, S)	Min	Max	98% tile	Min	Max	98% tile	Min.	Max.	98% tile	Min.	Max.	98% tile	Min	Max	98% tile
AAQ1	24		67.7	81.7	81.5	34.4	45.5	44.8	10.2	16.4	16.3	15.6	25.4	24.6	-	-	-
AAQ2	24		70.4	85	84.8	35.8	47.3	46.6	7.1	11.5	11.4	16.2	26.4	25.6	-	-	-
AAQ3	24		64.4	82.1	81.4	31.7	46.4	45.7	7.3	11.8	11.5	17	28.1	27.9	-	-	-
AAQ4	24		55.7	74.4	73.2	26.8	39.4	37.6	9.1	14.7	14.3	14.8	24.8	24.5	-	-	-
AAQ5	24		56.8	67.1	66.9	32	38.3	38.1	8.3	15.7	15.7	13.6	23.5	22.2	-	-	-
AAQ6	24		66.5	75.4	75.16	26.5	35.2	35.17	10.1	13.9	13.19	16.7	22	21.83	-	-	-
AAQ7	24		82.5	93.1	92.8	42.5	52	51.9	11.2	17.9	17.3	22.1	31.1	30.6	-	-	-
AAQ8	24		59.7	70.7	70.2	34	41.9	41.6	6.9	13.8	13.8	15.3	23.9	23	-	-	-

*R = Residential; I = Industrial; S = Sensitive

**Pb for mineral specific sites only.

Annex a location map indicating location of AAQ stations, their direction and distance with respect to project site.

22. Stack and emission details, if any*

Not Applicable

S. No.	Process / unit of operation (e.g. DG Set, Boiler)	Height of stack (m)	Internal top dia. (m)	Flue gas exit velocity (m/sec)	Emission rate (kg/hr)				Heat emission rate from top of stack (K.cal/hr)	Exhaust / Flue gas			
					SPM	SO ₂	NO _x	CO		Temp °C	Density	Specific Heat	Volumetric flow rate (m ³ /hr.)
	-	-	-	-	-	-	-	-	-	-	-	-	-

23. Details of fugitive emissions during mining operations*

Given in Chapter 4

24. Air Quality Impact Prediction (AQIP)*Not Applicable

(a) Details of model(s) used for AQIP including grid size, terrain features, and input meteorological data

(b) Maximum incremental GLC values of pollutants based on prediction exercise

S. No.	Pollutants	Incremental Value	Ambient Air Quality	(in µg/m ³)
				Resultant Air Quality
1.	SPM	2.32	81.7	84.02
2**.	SO ₂	-	-	-
3**.	NO _x	-	-	-

[* Question Number 22, 23 & 24 need not be filled-in for mines having ML area of **25 ha. or less.**]

[**Information on item no. 2 & 3 to be provided in cases with captive power generation of 500 KVA and above]

25. Water requirement (m³/day)

Purpose	Avg. Demand	Peak Demand
A. Mine site		
1. Mine operation	-	-
2. Land reclamation	-	-
3. Dust suppression	-	-
4. Drinking & domestic	0.68	0.68
5. Green Belt & Dust Suppression	6.44	6.44
6. Beneficiation	-	-
7. Washeries	-	-
8. Fire Service	-	-
9. Others (Mining and Allied Activities))	-	-
B. Township		
1. Green Belt	-	-
2. Domestic	-	-
C. Other (specify)		
	-	-
Total	7.12	7.12

26. Source of water supply*

S. No.	Source	m ³ /day
1	River (name)	-
2	Ground water	0.68
3	Mine water (sump / pit)	--
4	Other surface water bodies (water will be tapped from plant supply)	6.44

[*Annex a copy of sanction letter / permission from the concerned authority (Central Ground Water Authority in case of ground water abstraction is from notified area / State Ground Water Board in case of non-notified area / State Irrigation Department for surface water pumping) for drawing water.

27	Lean season flow in case of pumping from river / nalla (cumecs)	Not applicable
28	Ground water potential of the study area	-
28.1	Ground water availability	
a	Range of water table (m bgl)	-
i	Pre-monsoon (April/May)	
	Core Zone	-
	Buffer zone	-
ii	Post-monsoon (November)	
	Core Zone	-
	Buffer zone	-
b	Total annual replenish able recharge (million m ³ / year)	
i	By ground water table fluctuation method	-
ii	By rainfall infiltration factor method	-
c	Annual draft excluding estimated draft through mine discharge (million m ³ / year)	-
d	Estimated draft through mine discharge (million m ³ / year)	-
e	Net annual ground water availability (million m ³ / year)	-
f	Stage of ground water development (%)	-

28.2. Water demand - Competing users of the water source

S. No.	Usage	Present Consumption (m ³ /day)		Additional proposed as per local plan (m ³ /day)		Total (m ³ /day)	
		Surface	Ground	Surface	Ground	Surface	Ground
1	Domestic	-	-	-	0.68		0.68
2	Irrigation	-	-		-		-
3	Industry	-	-		-		-
4	Mining	-	-	-	-		-
5	Others (Dust suppression+ Green belt)	-	-	6.44		6.44	-
Total		--	--	6.44	0.68	6.44	0.68

29. Water quality*

(a) Annex physio -chemical analysis of water at intake point **

(Given in chapter 3 of EIA report.).

- (b) In case of existing mine, annex report on quality of water discharge
i.e. complete physico - chemical analysis**

[*For non-discharging mines at least four ground water samples to be taken preferably from downstream direction of the mine in pre-monsoon and post-monsoon periods and analysed. For discharging mines six samples are to be analysed]

**All parameters as per BIS 10500. Indicate name of Methodology, Equipment used for analysis, and Detection Level (DL) for each parameter.

*** Wherever any analytical parameter is below detection level, "BDL" (Below Detection Level) should be written instead of 'NIL'.

30.	Impact on ground water regime / stream / lake / springs due to mine dewatering *	Not required
a	Radius of influence (in m) [To be estimated based on analysis of pumping test data and application of empirical formula]	-
b	Whether saline water ingress will take place?(applicable to coastal areas)	-
c	Impact on stream / lake / springs	-
[* Provide a comprehensive hydro-geological assessment report if the average mine dewatering is more than 100 m³/day and or going below water table in non-monsoon period. The report should be based on preferably latest one-year pre-monsoon and post-monsoon baseline data covering information on ground water situation, aquifer characteristics, water level conditions (April – May and November), estimate of ground water resources, predicted impact of the project on ground water regime and detailed remedial / conservation measures such as artificial recharge of ground water etc. The report should be based on actual field inventory out of existing wells, at least 30 observation wells in the buffer zone with supplementary information from secondary sources (mention name). For estimation** of ground water resource (refer question no. 28 above) be designated study area of the buffer zone may be sub-divided into command and non-command areas, watershed-wise (in case of hard rock / consolidated formations) / block-wise / Mandal-wise in case of alluvial / unconsolidated formations)] [**For estimating ground water resources in the area follow the Ground Water Estimation Committee recommendations of 1997]		
31.	Waste Water Management	Not Applicable
a	Daily average discharge (m ³ /day) from different sources	-
i	Mine water discharge during	-
	Lean period	-
	Monsoon period	-
ii	Workshop	-
iii	Domestic (mine site)	-
iv	Beneficiation / Washeries	-
v	Coal Handling Plant	-

vi	Tailings pond	-	
vii	Others (Specify)	-	
	Total	-	
b	Waste water treatment plant; flow sheet for treatment process attached.	-	
C	Quantity of water recycled / reused / to be recycled in	-	
i	Percentage	-	
ii	m ³ /day	-	
d	Point of final discharge	-	
	Final Point	-	
1	Surface	-	
i	Agricultural land	-	
ii	Waste land	-	
iii	Forest land	-	
iv	Green belt	-	
2	River / nallah	-	
3	Lake	-	
4	Sea	-	
5	Others (specify)	-	
	Total	-	
e	Users of discharge water	Yes	No
i	Human		
ii	Livestock		
iii	Irrigation		
iv	Industry		
v	Others (specify)		
F	Details of the river / nalla, if final effluent is / will be discharged (cumecs)		
i	Average flow rate		
ii	Lean season flow rate		
iii	Aquatic life		
iv	Analysis of river water 100 meters upstream and 100 meters downstream of discharge point submitted.		
G	Township		
a	Waste water generation from township (m ³ /day)		
b	Are you planning to provide sewage treatment plant?		
C	Usage of treated water		
32.	Attach water balance statement in the form of a flow diagram indicating source (s), consumption (Section-wise) and output. Given in chapter 2 of EIA report		
33	Ambient noise level leq dB(A)	Details given in Chapter III	
34	Solid Waste-	10.2 Kg/day	

a	Top soil and Solid waste quantity and quality		
Name (Lump/fines/slurry/ Sludge/others)	Composition	Quantity (cum)	Method of disposal
Mining activity*			
a. Top Soil		--	--
b. Over burden		--	--
c. Others (20% intercalated waste)		--	--
Effluent Treatment Plant (sludge)		--	--
Total		--	--
[* Annex layout plan indicating the dump sites.]			
b (i)	Does waste (s) contain any hazardous/toxic substance/radioactive materials or heavy metals?		No
(ii)	If yes, whether details and precautionary measures provided?		NA
c	Recovery and recycling possibilities.		NA
d	Possible user(s) of the solid waste.		NA
e (i)	Is the solid waste suitable for backfilling?		NA
(ii)	If yes, when do you propose to start backfilling?		NA
Solid waste (s)	Already accumulated (A)	To be generated (B)	% of A & B to be backfilled
			A B
Over burden		--	--
Others (20% intercalated waste)		--	--
Land reclamation Plan			Not Applicable
f	In case waste is to be dumped on the ground, indicate		--
i	Associated environmental problems		
ii	Number & type of waste dumps		
	No. of external dumps		Nil
	Max. projected height of dumps (in m)		--
	No. of terraces and height of each stage		
	Overall slope of the dump (degree)		--
	Proposed reclamation measures		NA
iii	Section of the waste dump in relation to the adjacent ground profile attached		NA
35	Fuel / Energy requirements* [*To be furnished for mines having ML area n than 25 ha. or captive power generation of		Not Applicable

		500KVA and above]				
a		Total power requirement			(in MW)	
S. No.		Mine Site	Township	Others (specify)	Total	
1	Present					
2	Proposed / additional					
Total						
b		Source of power			(in MW)	
S. No.		SEB/Grid*	Captive power plant	DG Sets		
1	Present					
2	Proposed / additional					
Total						
[* Annex a copy of the sanction letter from the concerned authority]						
c		Details of fuels				
S.No	Fuel	Daily Consumption (TPD)		Calorific value (Kcals/kg)	% Ash	% Sulphur
		Existing	Proposed			
1	HSD					
2	LSHS					
3	Other (specify)					
36	Storage of inflammable / explosive materials				Not Applicable	
S. No.	Name	Number of Storages	Consumption (in TPD)	Maximum Quantity at any point of time		
1	Fuels					
2	Explosives					
37	Human Settlement					
		Core Zone		Buffer Zone		
Population*		-		Details given in Chapter III		
No. of villages		-				
Number of households village-wise		-				
[* As per 2001 census record or actual survey]						
38.	Rehabilitation & Resettlement (R&R) Plan* [*Provide a comprehensive rehabilitation plan, if more than 1000 people are likely to be displaced, other-wise a summary plan]			Not Applicable		
a	Villages falling within the study area					
		Villages				
		Number	Name			
Core zone						
500 m from the blasting site (s)						

Buffer zone						
Township site						
b	Details of village(s) in the core zone					
S. No.	Village name	Population*		Average Annual Income		
		Tribal	Others			
1						
[*As per 2001 census / actual survey]						
c	Population to be displaced and / or Land Oustees					
Name of village(s) falling within		Number of oustees				
		Land (only)	Homestead (only)	Land and Homestead (both)		
<u>Mining Lease</u>						
1.						
<u>Township Site</u>						
1.						
d	Whether R&R package has been finalized? If yes, salient features of R&R plan for oustees.			Not Applicable		
i	Site details where the people are proposed to be resettled & facilities existing / to be created.					
ii	Funds earmarked for compensation package					
iii	Agency / Authority responsible for their resettlement.					
iv	Time of commencement of resettlement of Project Affected People (PAP).					
v	Period by which resettlement of PAP will be over.					
39	Lease -wise plantation details					
a	Lease area (in ha.)		Existing	Proposed		
	i.	Area broken up	--	-		
	ii.	To be broken up	-	48.0 Ha.		
	iii.	Area not to be broken-up	-	-		
b	Township area (in ha.)		-			
c	Area afforested and proposed (in ha.)		-			
		Peripheral	Dumps	Roads	Township	Others
i	Existing					
ii	Proposed					
d	No. and type of trees planted and proposed					
i	Existing			--		
	When plantation was started?			Month / Year		
	No. of plant species planted			Number saplings (per ha.)		
	Bael, Neem, Aam, Amrud, Ashok, Jamun			10(480 will be planted Tree in first Year)		
	Survival rate %			Avg. height		

ii	Proposed	
	No. of plant species to be planted	Number of saplings (per ha.)
	--	--
40	Environmental health and safety	
a	What major health and safety hazards are anticipated?	Refer Chapter VII
	What provisions have been made/proposed to be made to conform to health and safety requirements?	As per Mines Act/ Rules
	In case of an existing mine	
i	Comprehensive report on health status of the workers as under the Mines Act annexed	As per Mines Act/ Rules
ii	Mineralogical composition of RPM (dust)	
	• Free silica	Not applicable
	• Chromium* (Total as well as Hexavalent)	Not applicable
	• Lead** [* Only for Chromite mines] [**Only for Base Metal mines]	Not applicable
	Information on radiation protection measures, if applicable	Not applicable

41. Environmental Management Plan

Salient features of environmental protection measures

S. No.	Environmental issues*	Already practiced, if applicable	Proposed
1	Air pollution	-	1) Regular water sprinkling, plantation 2) Plantation will be done on both sides of the road
2	Water pollution	-	--
3	Water conservation	-	General awareness,
4	Noise pollution	-	Preventive maintenance of machines,
5	Solid waste / Tailings	-	Separate dustbin will be arranged at project site and managed as per Solid Waste Management Guidelines 2016.
6	Land degradation	-	NA
7	Erosion & Sediment	-	NA
8	Top soil	-	NA
9	Ground vibration	-	NA
10	Wildlife conservation	-	NA
11	Forest protection	-	NA
12	Others (specify)	-	Social training and general awareness

SL. No	Area of Concern	Action Plan	Budget Allocated (in Lakh)	Time Period
1.	School Infrastructure	Infrastructure development for school campus renovation	22.0	1st Year
2.	Development activities in the nearest village with CER	Installation of solar lighting in 2 villages namely as Bhusaula and Bharkunria (Rs. 25,000 x 40 nos.)	10.0	2nd Year
Total			32.0	

48. Public Hearing

a	Date of Advertisement	14.05.2024	
b	Newspapers in which the advertisement appeared	Dainik Jagran, Dainik Bhaskar	
c	Date of public hearing (DD/MM/YYYY)	18 th of June, 2024	
d	Public Hearing Panel chaired by & members present	• “Shree Surya Pratap Singh (IAS), Sub Divisional Officer, Dehri, Rohtas (Nominated by District Collector- Rohtas). • Shree Aashish Kumar Gupta, Regional Officer, BSPCB, Patna.	
e	No. of people attended the public hearing meeting and number of people from the lease area.	Around 59.	
f	Summary/details of public hearing in tabular form Given in chapter 7 of the EIA report.		
49	Whether the following approvals* (wherever	YES	NO
a	Site clearance from MoEF	-	√
b	Consent for Establishment’ from the State Pollution Control Board	-	√
c	NOC from Atomic Mineral Division	-	√
d	Mining plan approval from IBM / Ministry of Coal	√	-

